



EMC TEST REPORT

Report No.: SET2017-03723

Product: Off-Grid Solar Inverter

Model No: 30kVA, 40kVA, 50kVA, 60kVA

Applicant: EAST Group Co., Ltd.

Address: No.6 Northern Industry Road, Songshan Lake Sci. & Tech.
Industrial Park, Dongguan City, Guangdong Province, China

Issued by: CCIC Southern Electronic Product Testing (Shenzhen)CO., Ltd.

Lab location: Electronic Testing Building, No. 43 Shahe Road, Xili Jiedao,
Nanshan District, 518055 Shenzhen, Guangdong, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238



This test report consists of 44 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Report

Product.....: Off-Grid Solar Inverter

Model No.: 30kVA, 40kVA, 50kVA, 60kVA

Brand Name.....: ----

Applicant.....: EAST Group Co., Ltd.

Applicant Address.....: No.6 Northern Industry Road, Songshan Lake Sci. & Tech. Industrial Park, Dongguan City, Guangdong Province, China

Manufacturer.....: EAST Group Co., Ltd.

Manufacturer Address.....: No.6 Northern Industry Road, Songshan Lake Sci. & Tech. Industrial Park, Dongguan City, Guangdong Province, China

Test Standards.....: **EN 62040-2:2006+AC:2006 (IEC 62040-2:2005)**
Uninterruptible power systems (UPS) - Part 2:
Electromagnetic compatibility (EMC) requirements

Test Result.....: Pass

Tested by: Jiang Haibiao May. 15, 2017
Signature, Date

Reviewed by.....: Lu-Tongzhou May. 15, 2017
Signature, Date

Approved by.....: Smartli May. 15, 2017
Signature, Date



Table of Contents

Report.....	2
1 General Information.....	6
1.1 Description of EUT.....	6
1.2 Objective.....	6
2 Test Facilities and Configuration.....	7
2.1 Environmental Conditions.....	7
2.2 Measurement Uncertainty.....	7
2.3 Test Standards and Results.....	7
2.4 List of Equipments Used.....	8
3 Emission Test.....	9
3.1 EUT Setup and Operating Conditions.....	9
3.2 Mains Terminal Disturbance Voltage Measurement.....	9
3.2.1 Limits of Mains Terminal Disturbance Voltage.....	9
3.2.2 Test Setup.....	9
3.2.3 Test Result.....	10
3.3 Radiated Disturbance Measurement.....	24
3.3.1 Limits of Radiated Disturbance.....	24
3.3.2 Test Setup.....	24
3.3.3 Test Result.....	24
4 Immunity Test.....	30
4.1 EUT Setup and Operating Conditions.....	30
4.2 Performance Criteria.....	30
4.3 Electrostatic Discharge Immunity Test.....	30
4.3.1 Test Specification.....	30
4.3.2 Test Setup.....	31
4.3.3 Test Result.....	31



4.4 Radiated, Radio Frequency Electromagnetic Field Immunity Test	32
4.4.1 Test Specification	32
4.4.2 Test Setup	32
4.4.3 Test Result	33
4.5 Electrical Fast Transient/Burst Immunity Test	33
4.5.1 Test Specification	33
4.5.2 Test Setup	33
4.5.3 Test Result	34
4.6 Surge Immunity Test	34
4.6.1 Test Specification	34
4.6.2 Test Setup	34
4.6.3 Test Result	34
4.7 Immunity to Conducted Disturbances Induced by RF Fields	35
4.7.1 Test Specification	35
4.7.2 Test Setup	35
4.7.3 Test Result	35
4.8 Power Frequency Magnetic Field Immunity Test	36
4.8.1 Test Specification	36
4.8.2 Test Setup	36
4.8.3 Test Result	36
4.9 Power line harmonics and inter-harmonics	37
4.9.1 Test Specification	37
4.9.2 Test Setup	37
4.9.3 Test Result	37
4.10 Power line unbalance	38
4.10.1 Test Specification	38



4.10.2 Test Setup	38
4.10.3 Test Result	38
Appendix I: Photographs of the EUT.....	39
Appendix II: Photographs of EMC Test Configuration	40



1 General Information

1.1 Description of EUT

Product: Off-Grid Solar Inverter
Model No.: 30kVA, 60kVA
Brand Name: ----
Serial No.: /

Rating: 60kVA:

DC Input: PV - voltage range: 350-750 d.c.V
PV current: 3×60 d.c. A max DC input: 360 d.c.V
AC Input: 380Vac, 3Φ+N+PE, 50/60Hz, 144A
AC Output: 380Vac, 3Φ+N+PE, 50/60Hz, 91A
Power : 54kW.

30kVA:

DC Input: PV - voltage range: 350-750 d.c.V
PV current: 2×60 d.c. A max DC input: 360 d.c.V
AC Input: 380Vac, 3Φ+N+PE, 50/60Hz, 73A
AC Output: 380Vac, 3Φ+N+PE, 50/60Hz, 45A
Power : 27kW.

Accessories: /

NOTE:

1. The EUT belongs to Category C3, intended to be used in the second environment. The following warning shall be included in the instruction for use:

Warning

In a domestic environment this product may cause radio interference in which case supplementary mitigation measures may be required.

2. Model 30kVA, 40kVA, 50kVA and 60kVA have the same circuit and structure. Models differ only on their electrical rating and power component. According to the differences, all tests were performed on model 60kVA, Mains terminal disturbance voltage and Radiated disturbance were performed on the model 30kVA.
3. For more detailed features description about the EUT, please refer to User's Manual.

1.2 Objective

Perform Electro Magnetic Interference (EMI) and Electro Magnetic Susceptibility (EMS) tests for CE Marking.

2 Test Facilities and Configuration

2.1 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

2.2 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in Measurement” (GUM) published by ISO.

- Uncertainty of Conducted Emission, $U_c = \pm 3.6\text{dB}$
- Uncertainty of Radiated Emission, $U_c = \pm 5.0\text{dB}$

2.3 Test Standards and Results

The EUT has been tested according to the following specifications:

EMISSION		
Standard	Test Type	Result
EN 62040-2:2006+AC:2006	Mains terminal disturbance voltage	PASS
IEC 62040-2:2005	Radiated disturbance	PASS
IMMUNITY (EN 62040-2:2006+AC:2006, IEC 62040-2:2005)		
Basic Standard	Test Type	Result
IEC 61000-4-2	Electrostatic discharge immunity	PASS
IEC 61000-4-3	Radiated, radio frequency electromagnetic field immunity	PASS
IEC 61000-4-4	Electrical fast transient/burst immunity	PASS
IEC 61000-4-5	Surge immunity	PASS
IEC 61000-4-6	Immunity to conducted disturbances induced by RF fields	PASS
IEC 61000-4-8	Power frequency magnetic field immunity	PASS
IEC 61000-2-2	Power line harmonics and inter-harmonics/ Power line unbalance	PASS

NOTE: The latest versions of basic standards are applied.



2.4 List of Equipments Used

Description	Manufacturer	Model No.	Calibration Due Date	Serial No.
Test Receiver	ROHDE&SCHWARZ	ESCI	Jun.26, 2017	A130901474
LISN	SCHWARZBECK	NNLK8130	Jun.02, 2017	A131001541
Broadband Ant.	SCHWARZBECK	VULB 09160	May.25,2019	A0805560
ESD Test System	3C TEST	EDS30T	Jun.13, 2017	A161002598
EFT/Surge Test System	EM TEST	UCS500N7.7	Nov. 02, 2017	A130201094
	EM TEST	CNI503B9.3	Nov. 02, 2017	A130201095
Power Amplifier	MILMEGA	80RF1000-1000	Mar. 29, 2018	A140101634
Signal Generator	ROHDE&SCHWARZ	SMB100A	Nov.02, 2017	A141002004
Power Meter	Amplifier Research	E4417A	Nov.02, 2017	A140701873
EMS Antenna	Amplifier Research	STLP 9128 E	Jan.28, 2018	A151002436
CDN	TESEQ	M5	Mar.27, 2018	A161102606
Power Amplifier	TESEQ	NSG4070	Mar.29, 2018	A160602544
Anechoic Chamber	Albatross	EMC 12.8*6.8*6.4(m)	May.29, 2017	A0802520
AC Power source	Chroma	Chroma 61860	Jan.20, 2018	A150202185
Magnetic Field Tester	HAEFELY	MAG 100.1	Jun, 01. 2017	A0103109

NOTE: Equipment above has been calibrated and is in the period of validation.

3 Emission Test

3.1 EUT Setup and Operating Conditions

The EUT was powered by 380VAC and 540VDC mains, was continuously operated.

Environment Condition:

Temperature: 24°C; Relative Humidity: 55%; Pressure: 101kPa

Test Date: 2017-03-11

Test Engineer: Jiang Haibiao

Test Site: EMC Lab

3.2 Mains Terminal Disturbance Voltage Measurement


3.2.1 Limits of Mains Terminal Disturbance Voltage

Frequency range (MHz)	Limits (dB μ V), Category C3	
	Quasi-peak	Average
0.15 - 0.5	100	90
0.5 - 5	86	76
5-30	90-70	80-60

NOTE:

1. The lower limit shall apply at the transition frequencies.

3.2.2 Test Setup

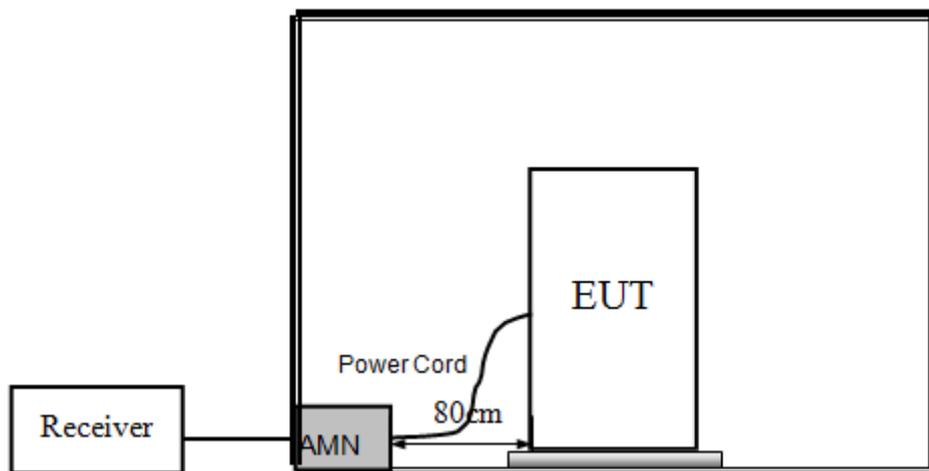



3.2.3 Test Result

60kVA Model 1 AC input:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.4420	100	90	81.3	76.6
2	0.5060	86	76	72.9	68.7
3	1.2740	86	76	77.0	60.1
4	1.5140	86	76	78.9	61.4
5	9.6220	82.1	72.1	68.3	56.5
6	15.4020	76.9	66.9	65.5	55.3

60kVA Model 1 output:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.4580	100	90	83.6	79.5
2	0.5060	86	76	76.7	73.3
3	0.7780	86	76	74.6	67.1
4	1.3180	86	76	78.1	64.3
5	1.4700	86	76	75.3	70.4
6	2.8860	86	76	73.7	68.6

60kVA Model 2 output:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.1500	100	90	82.3	77.2
2	0.7620	86	76	70.4	66.2
3	1.3940	86	76	71.2	66.8
4	1.4700	86	76	74.4	69.9
5	2.86200	86	76	73.4	68.7

**30kVA Model 1 AC input:**

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.1700	100	90	75.1	68.0
2	0.2340	100	90	77.4	69.7
3	1.1500	86	76	66.6	62.4
4	1.6700	86	76	72.1	55.6
5	3.4940	86	76	66.3	62.0

30kVA Model 1 output:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.6060	86	76	73.1	69.0
2	1.4860	86	76	72.3	68.1
3	1.5500	86	76	72.2	67.3
4	3.0740	86	76	72.8	68.3
5	3.5140	86	76	76.5	71.8

30kVA Model 2 output:


No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.5940	86	76	71.9	68.5
2	1.1660	86	76	69.9	65.9
3	1.4860	86	76	72.0	68.3
4	3.1100	86	76	72.8	67.9
5	3.4980	86	76	76.8	72.0

NOTE:


1. QP and AV are abbreviations of the quasi-peak and average individually.
2. If the emission levels measured with QP detector are lower than AV limits, there is unnecessary to measure with AV detector.
3. The emission levels recorded above is the larger ones of each phase.

60kVA Model 1 AC input:


Mains terminal disturbance voltage, L1 phase

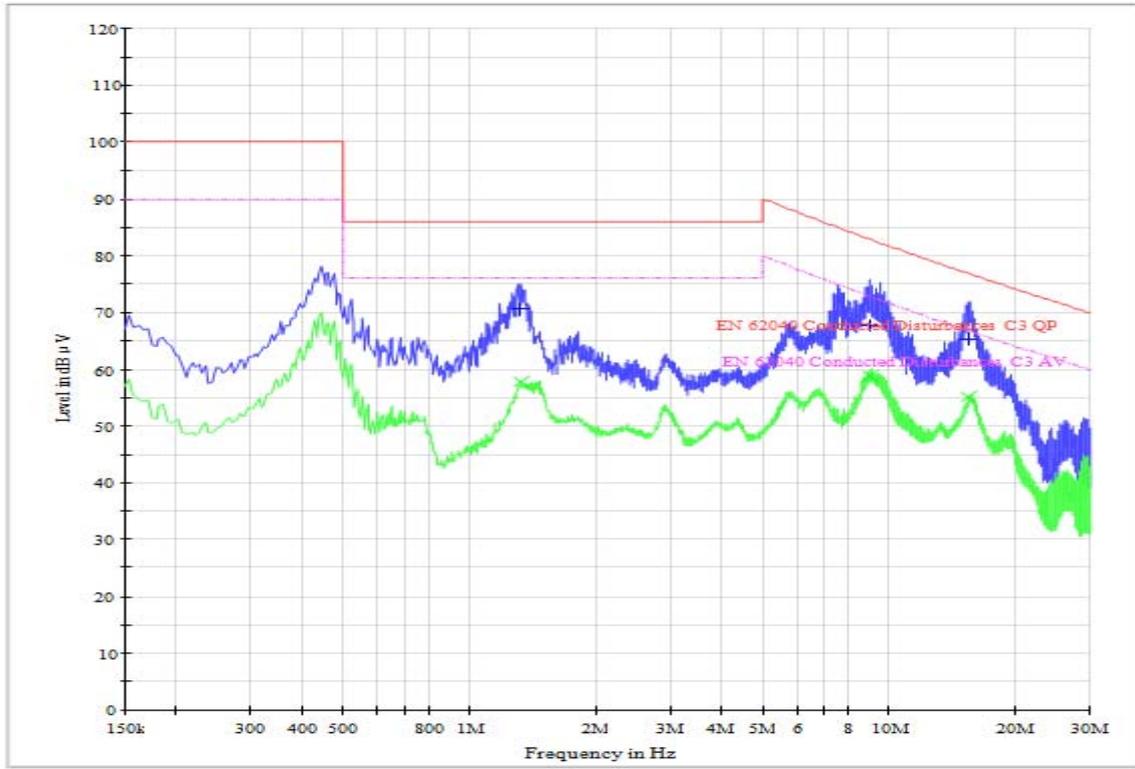


Mains terminal disturbance voltage, L2 phase

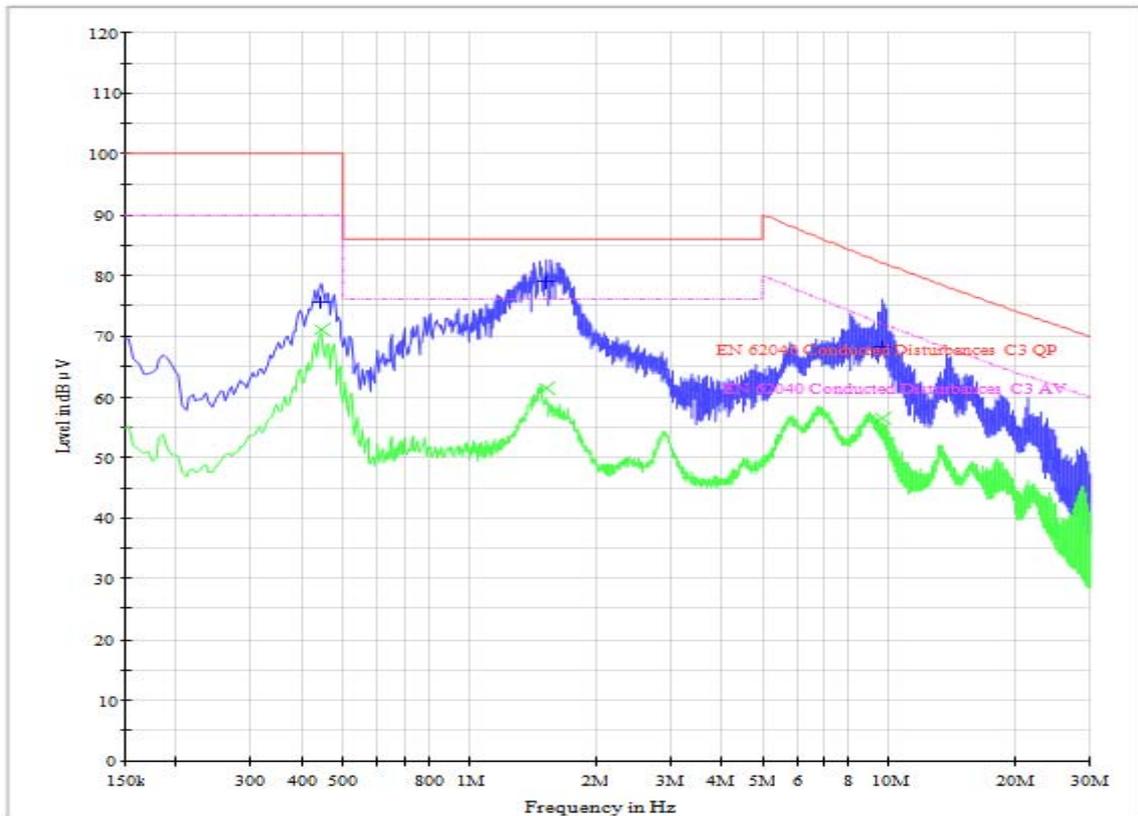

Mains terminal disturbance voltage, L3 phase

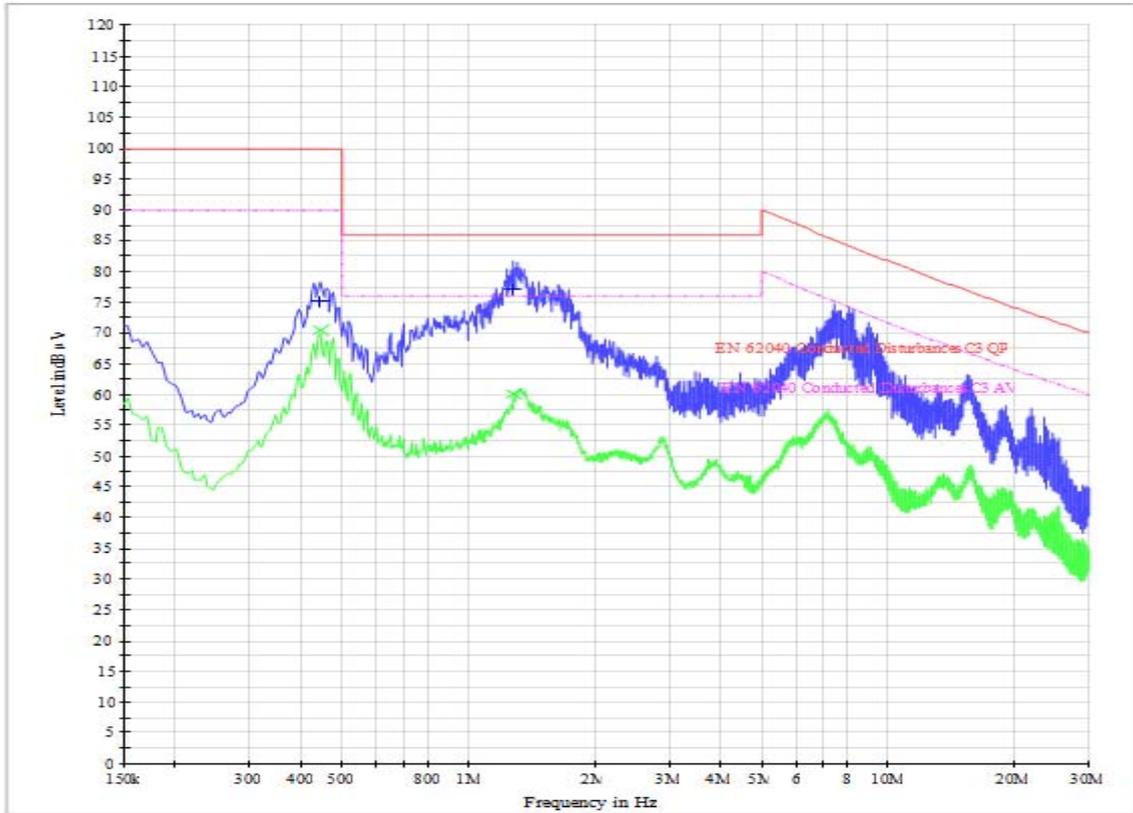


Mains terminal disturbance voltage, N phase

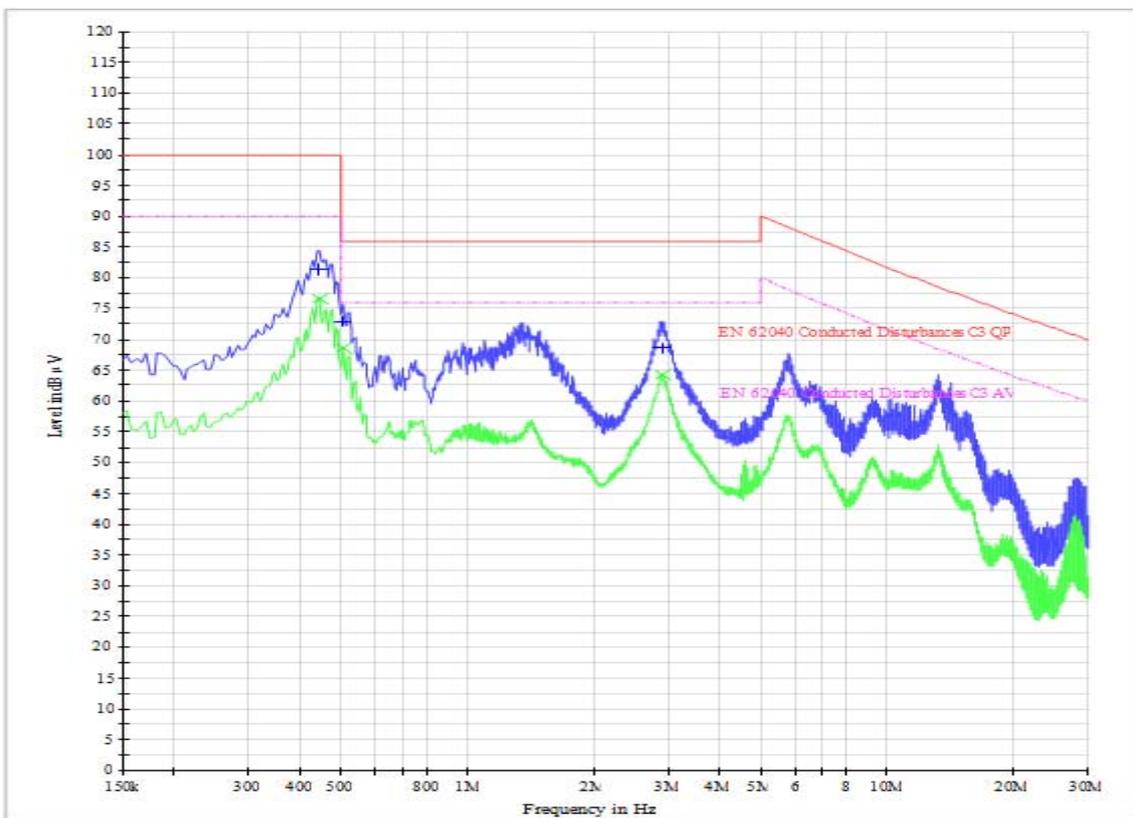


60kVA Model 1 AC output:


Mains terminal disturbance voltage, L1 phase

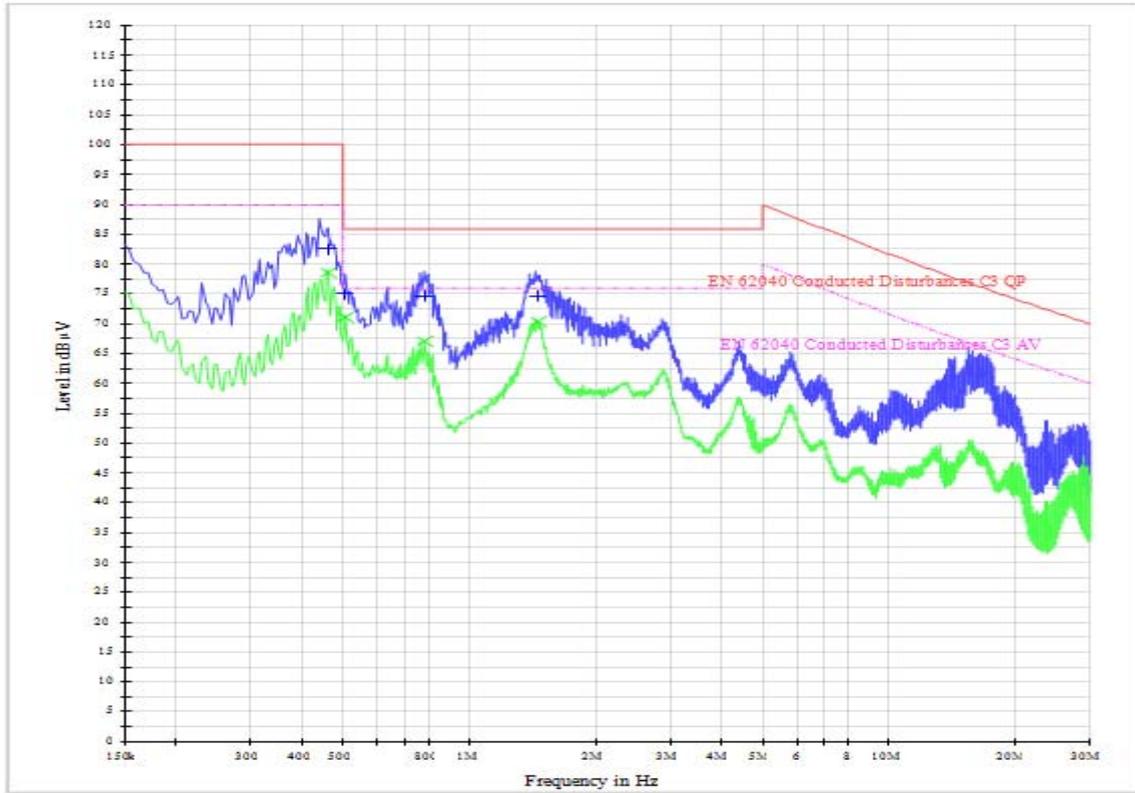


Mains terminal disturbance voltage, L2 phase

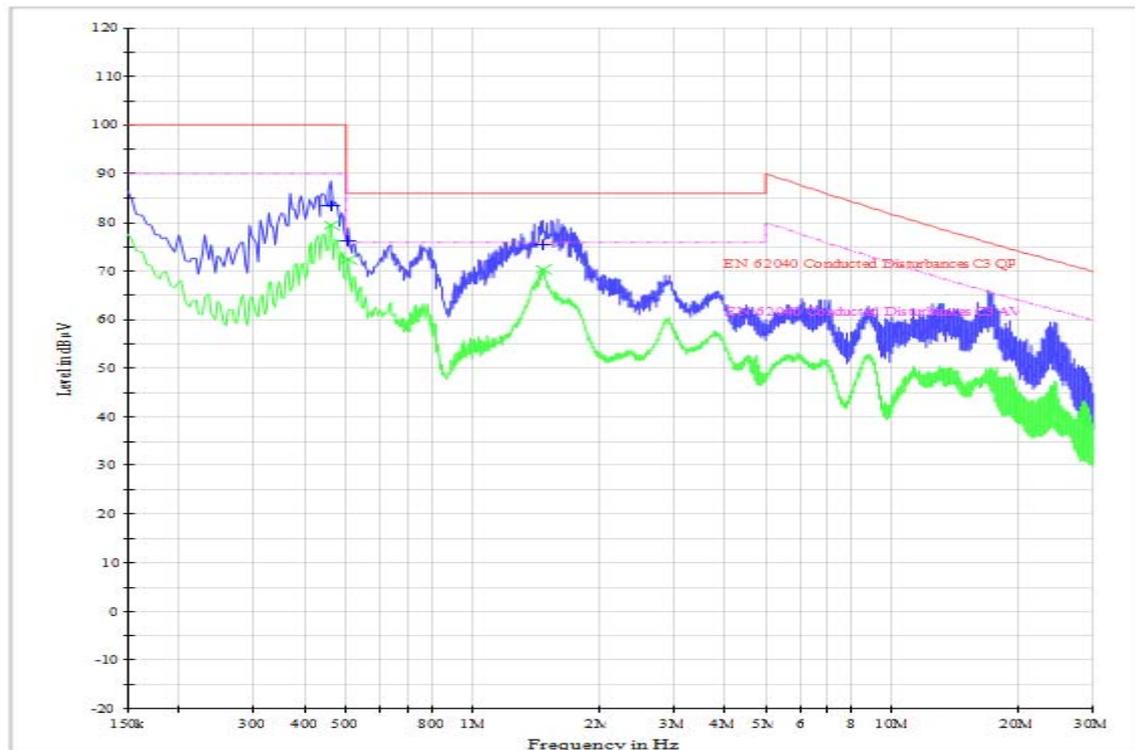

Mains terminal disturbance voltage, L3 phase

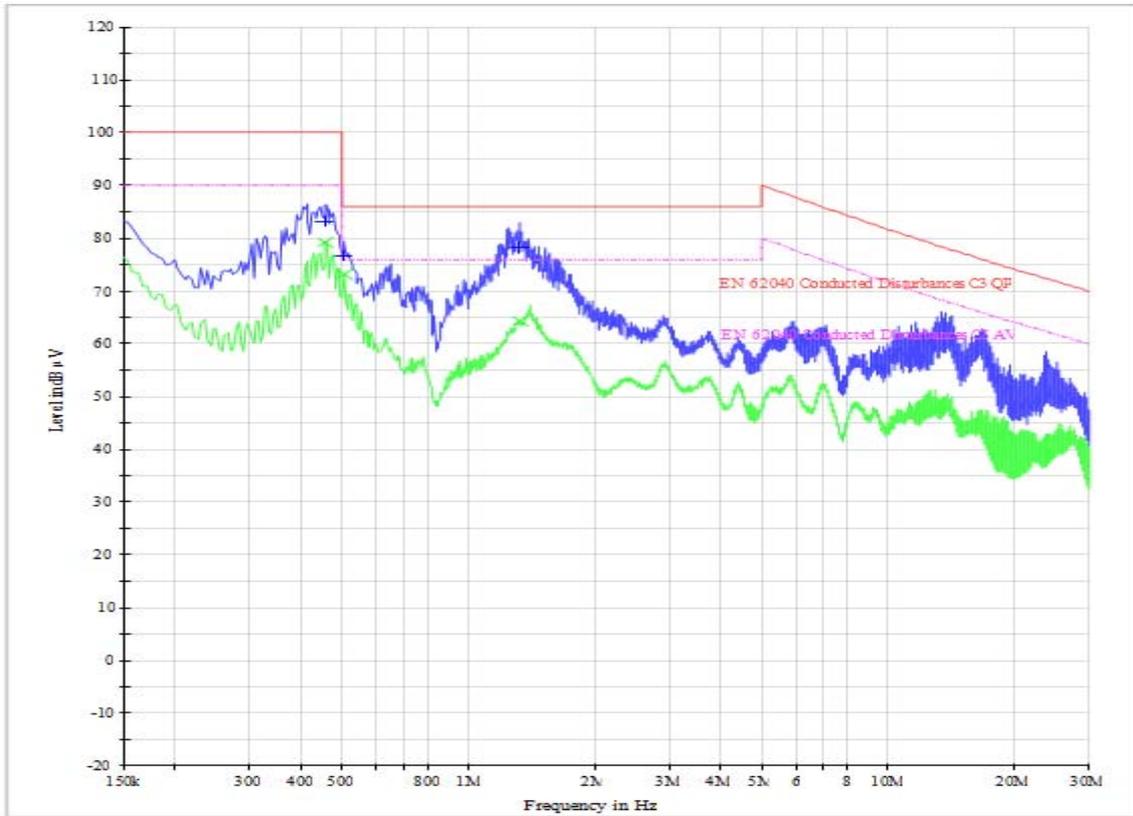


Mains terminal disturbance voltage, N phase

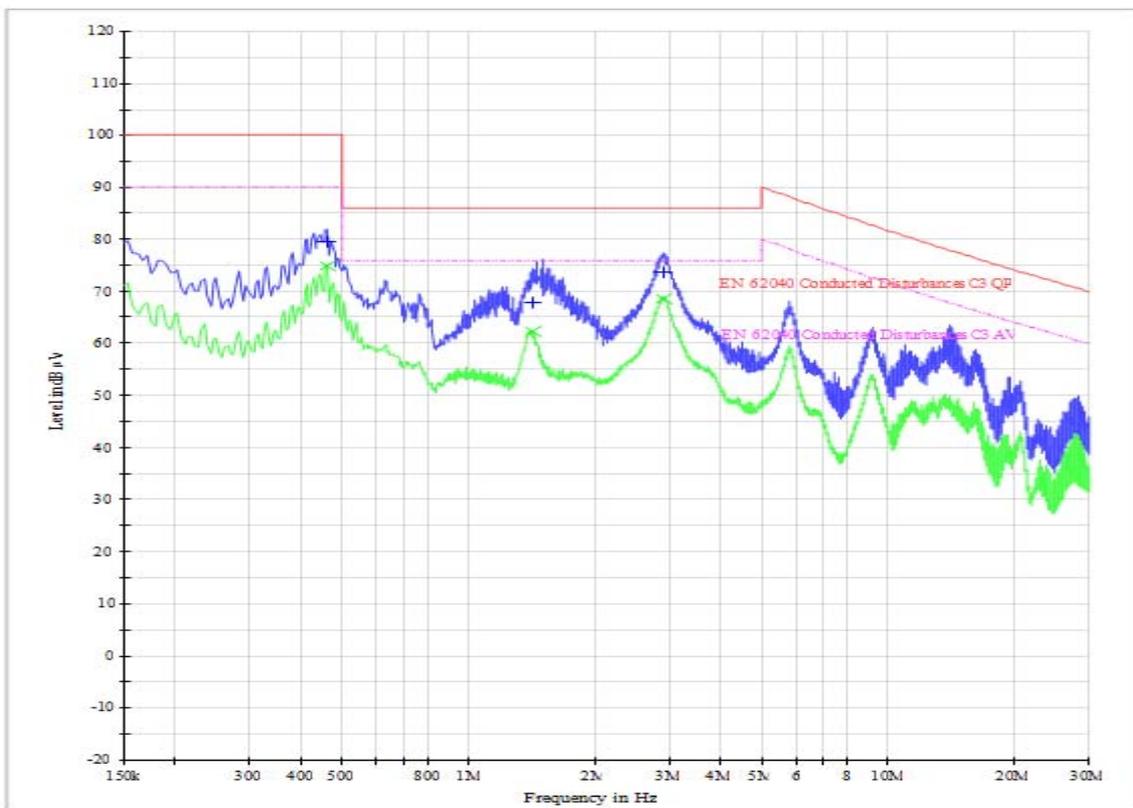


60kVA Model 2 AC output:


Mains terminal disturbance voltage, L1 phase

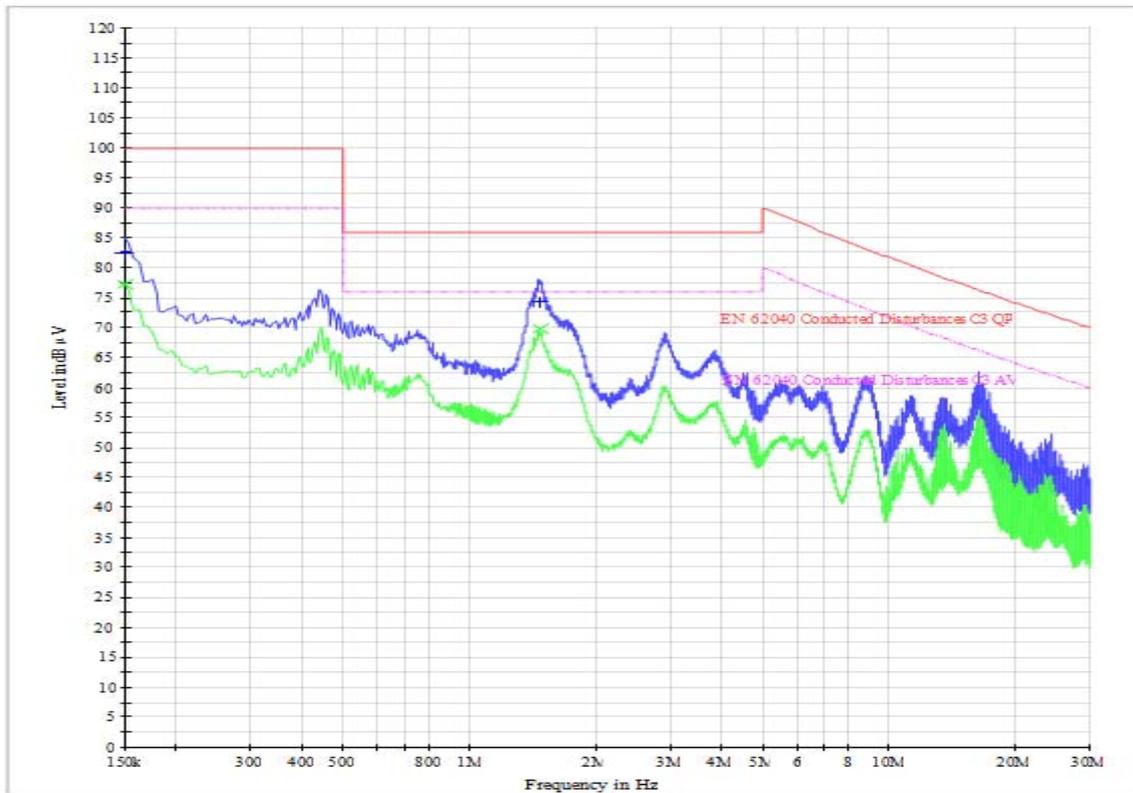


Mains terminal disturbance voltage, L2 phase

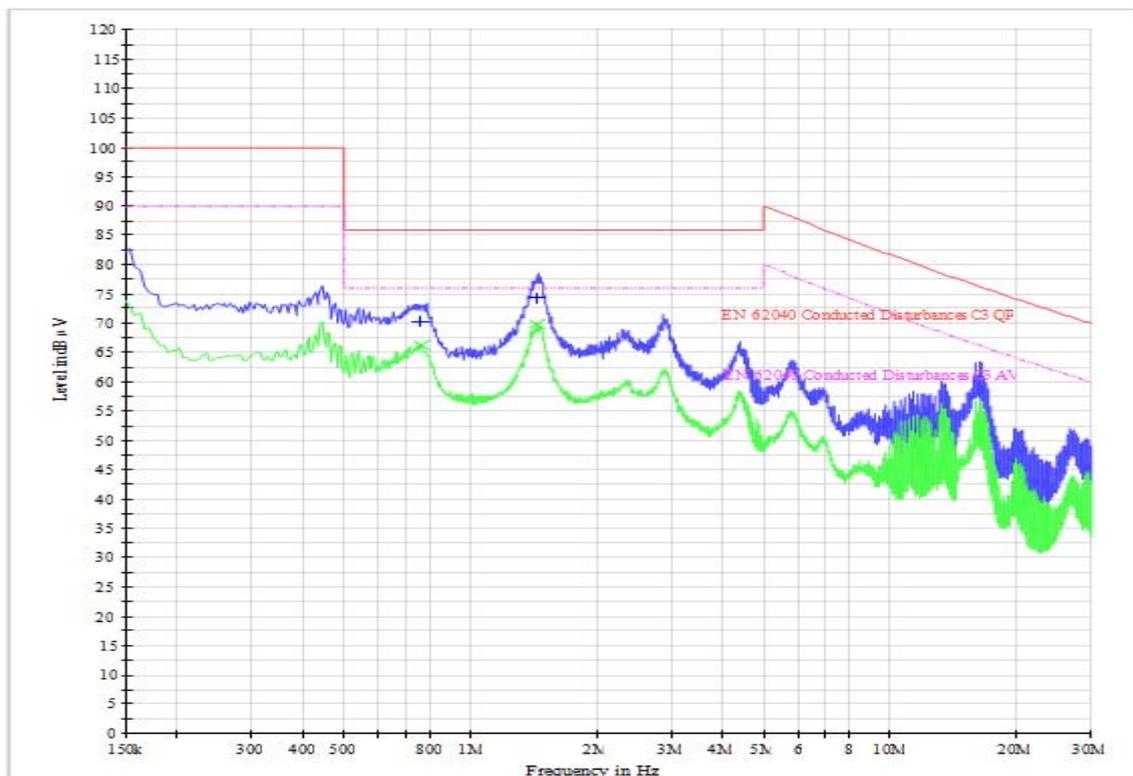

Mains terminal disturbance voltage, L3 phase

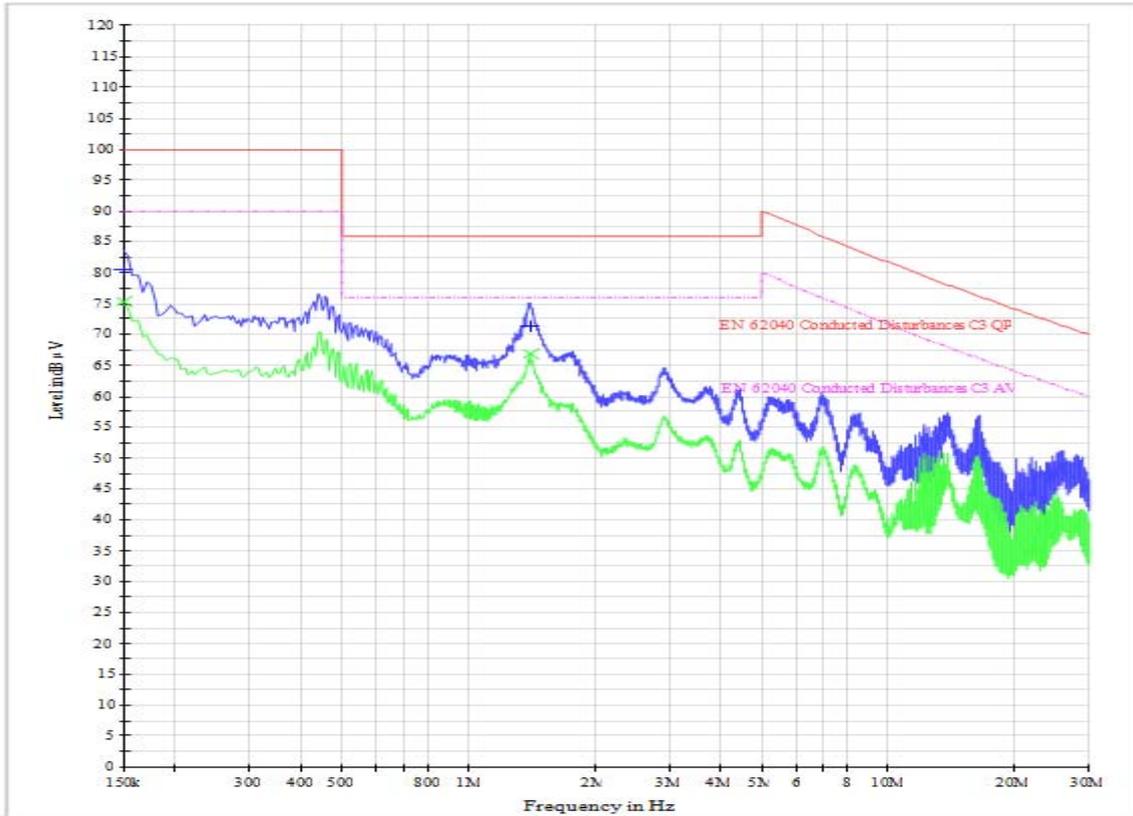


Mains terminal disturbance voltage, N phase

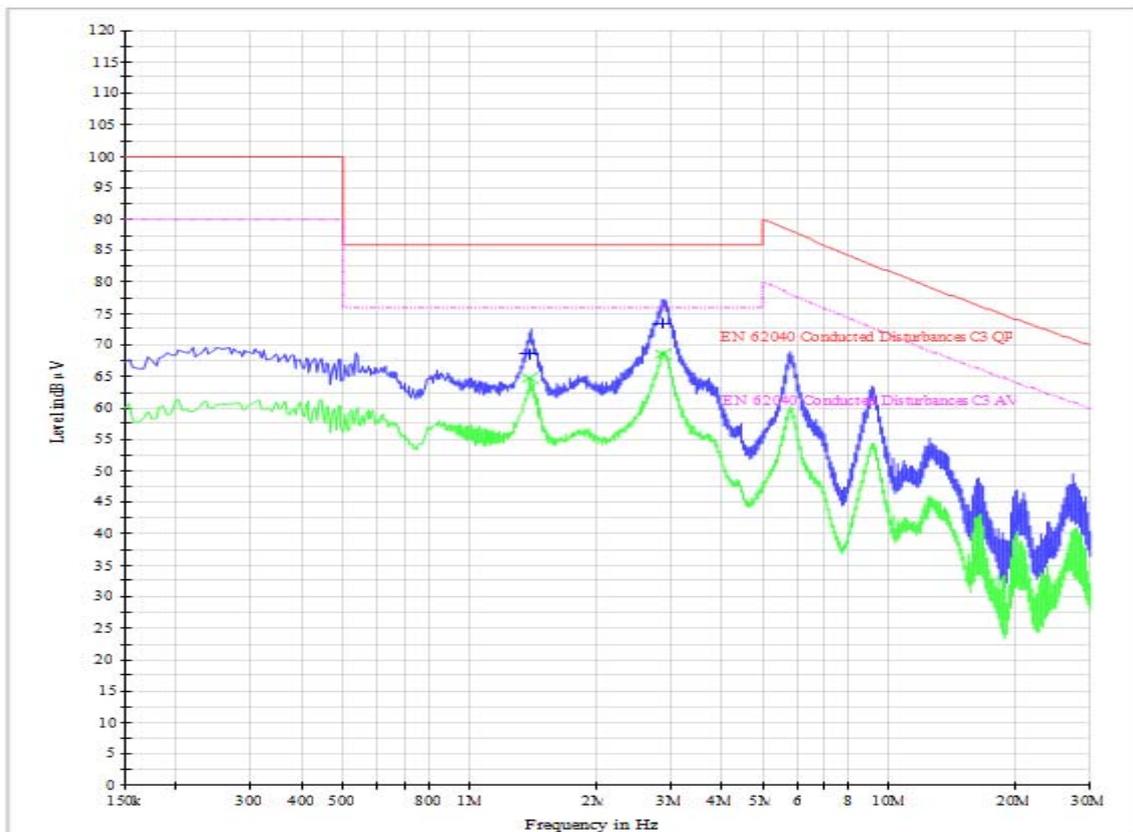


30kVA Model 1 AC input:


Mains terminal disturbance voltage, L1 phase

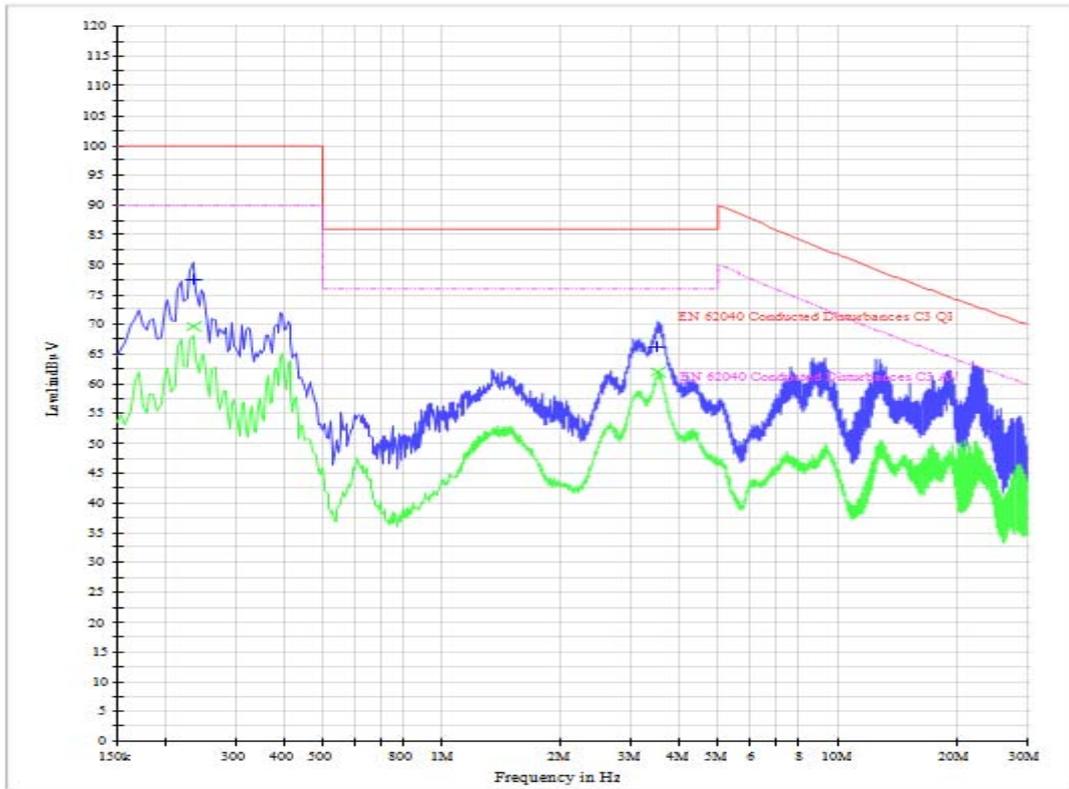


Mains terminal disturbance voltage, L2 phase

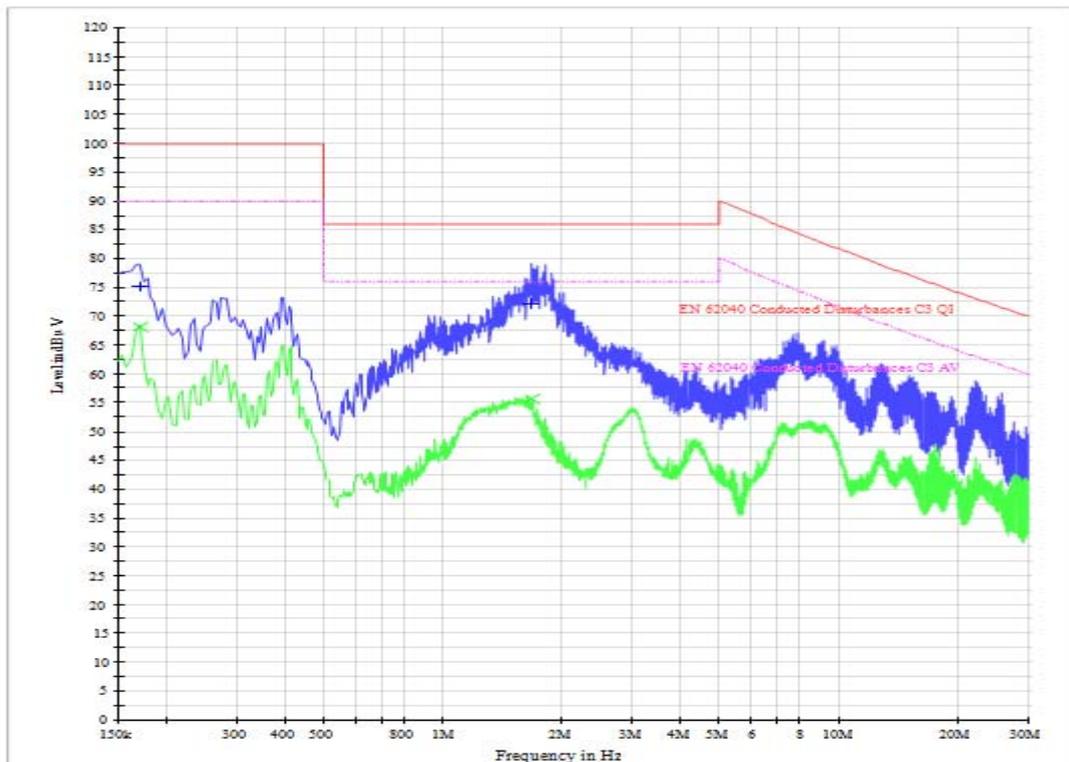

Mains terminal disturbance voltage, L3 phase

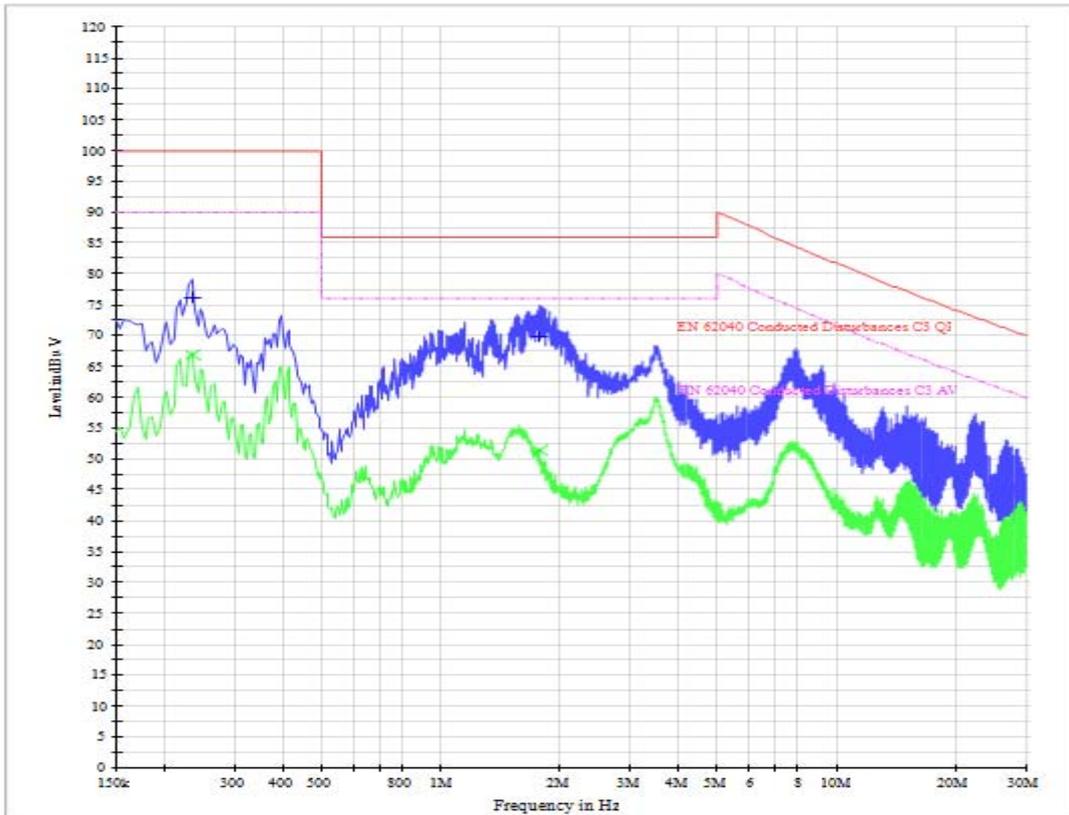


Mains terminal disturbance voltage, N phase

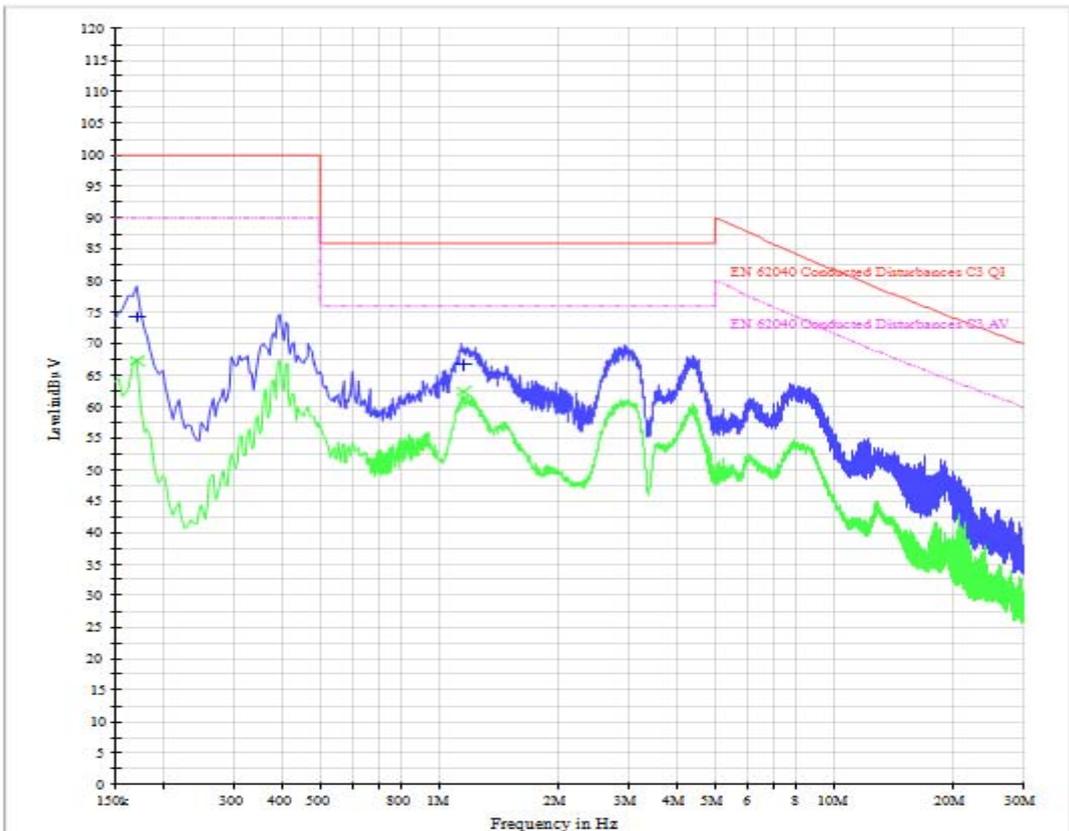


30kVA Model 1 AC output:


Mains terminal disturbance voltage, L1 phase

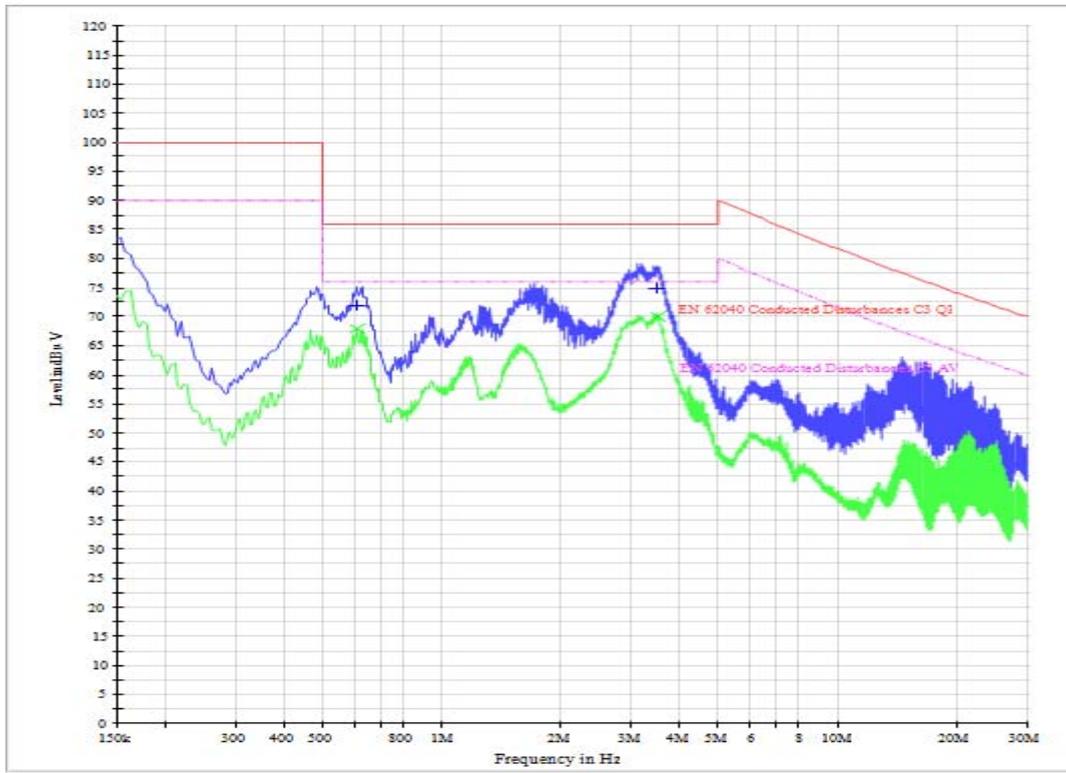


Mains terminal disturbance voltage, L2 phase

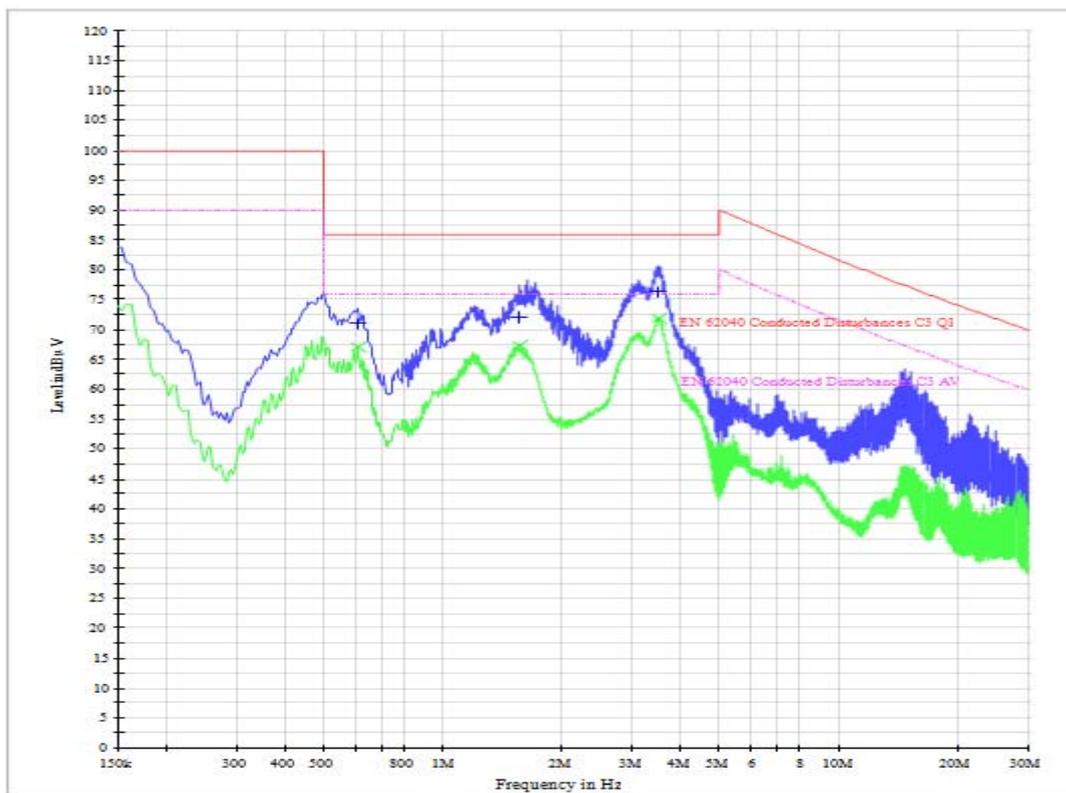

Mains terminal disturbance voltage, L3 phase

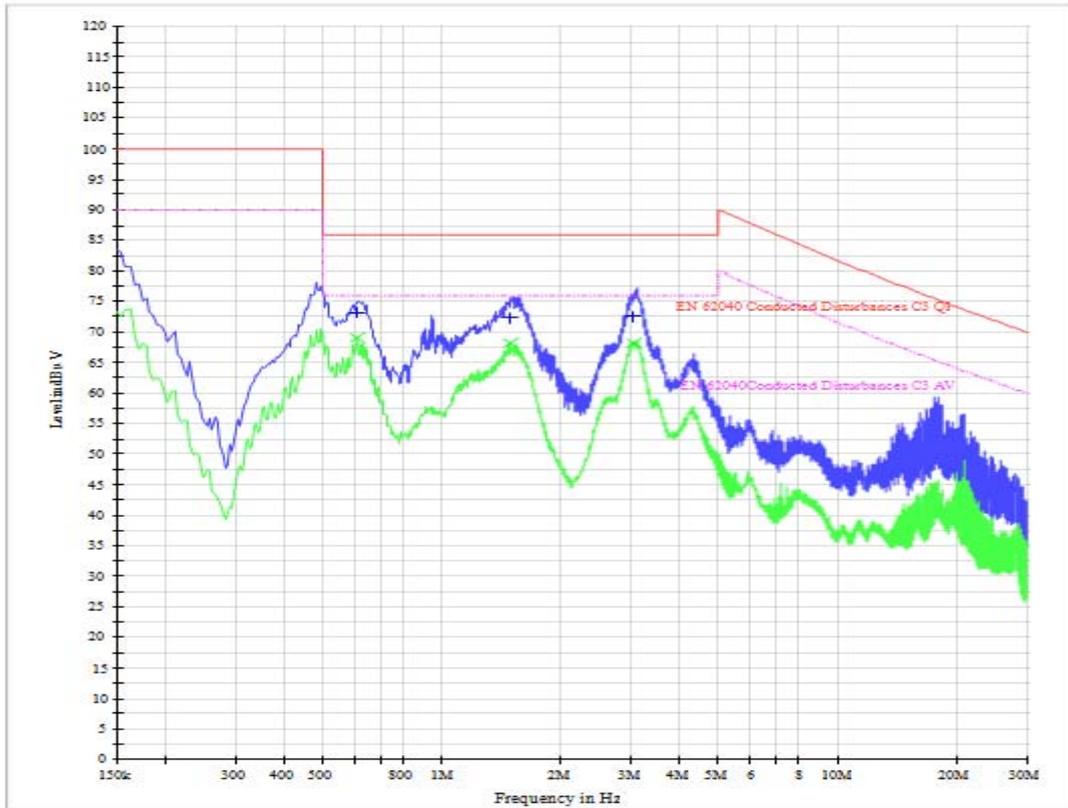


Mains terminal disturbance voltage, N phase

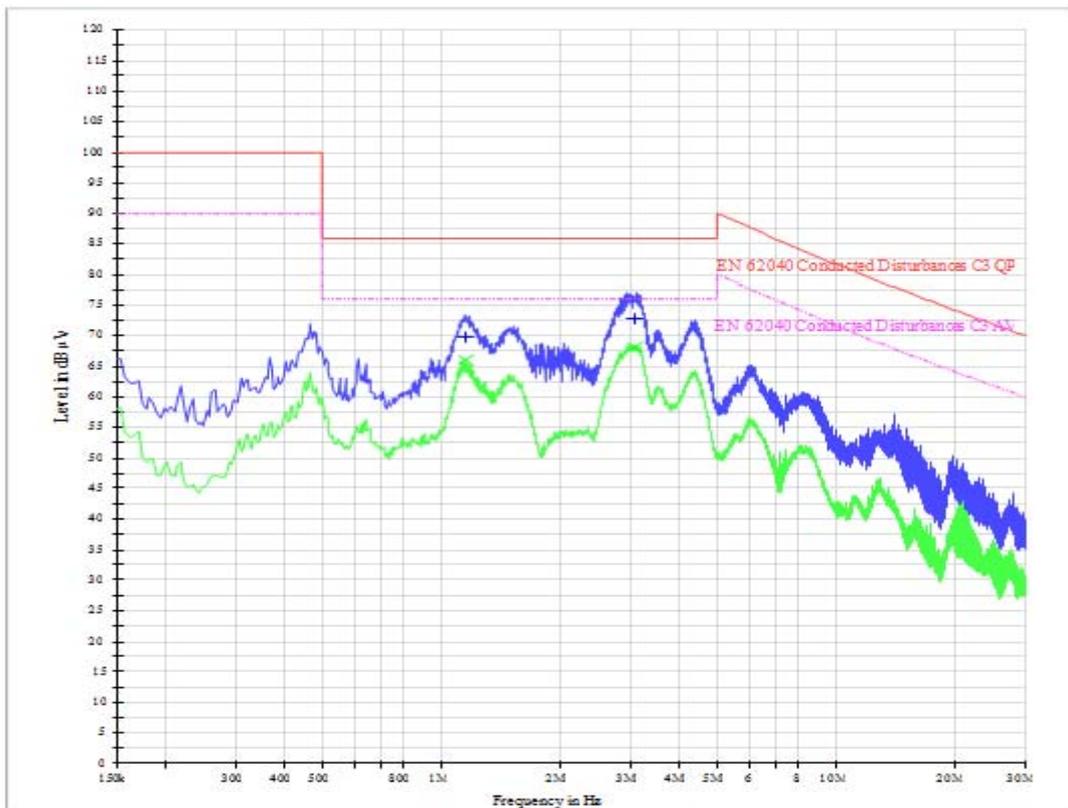


30kVA Model 2 AC output:


Mains terminal disturbance voltage, L1 phase

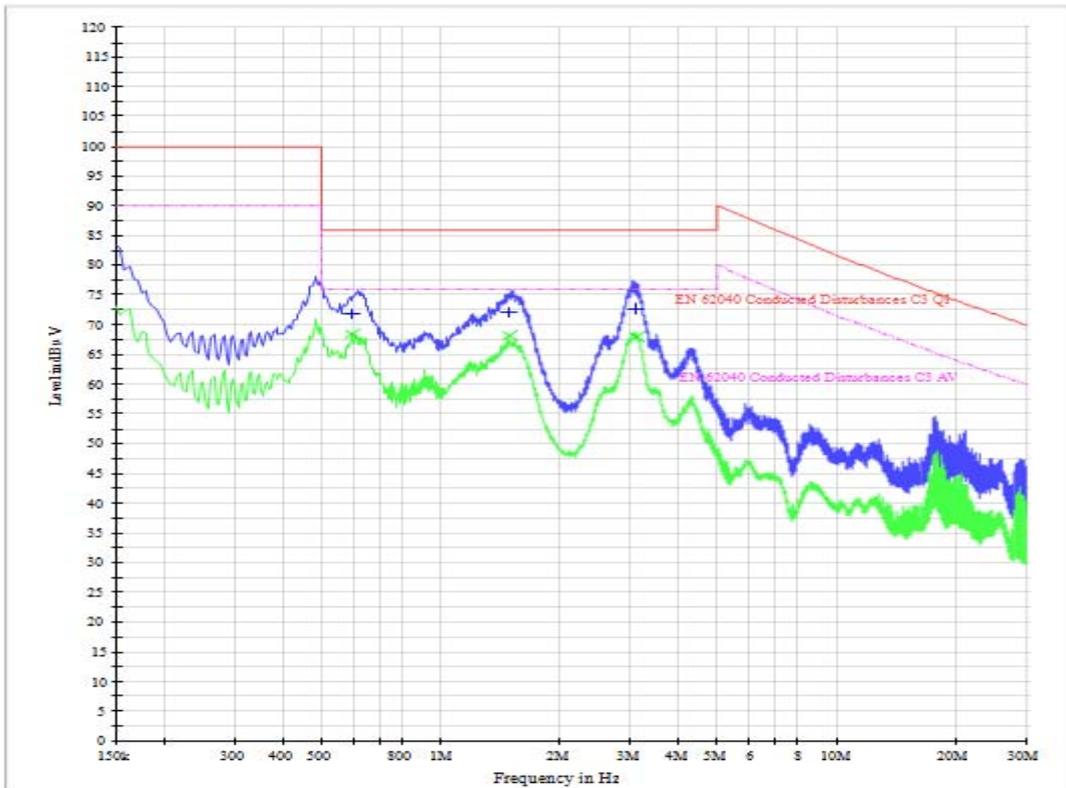


Mains terminal disturbance voltage, L2 phase

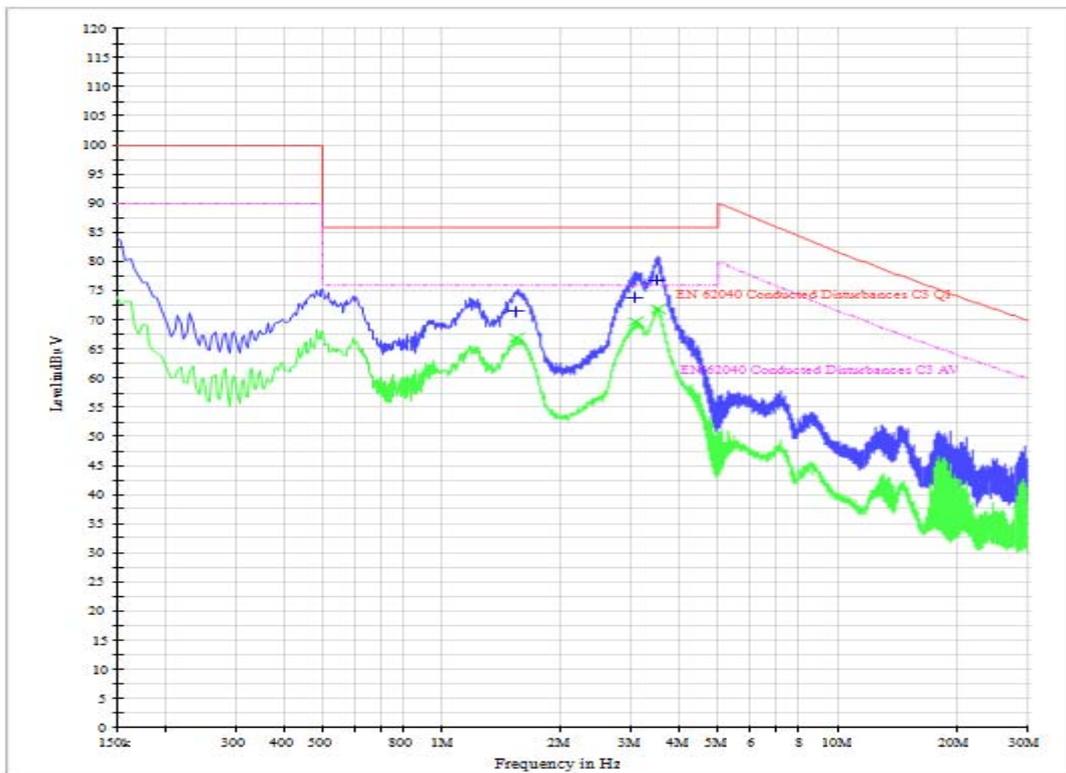

Mains terminal disturbance voltage, L3 phase

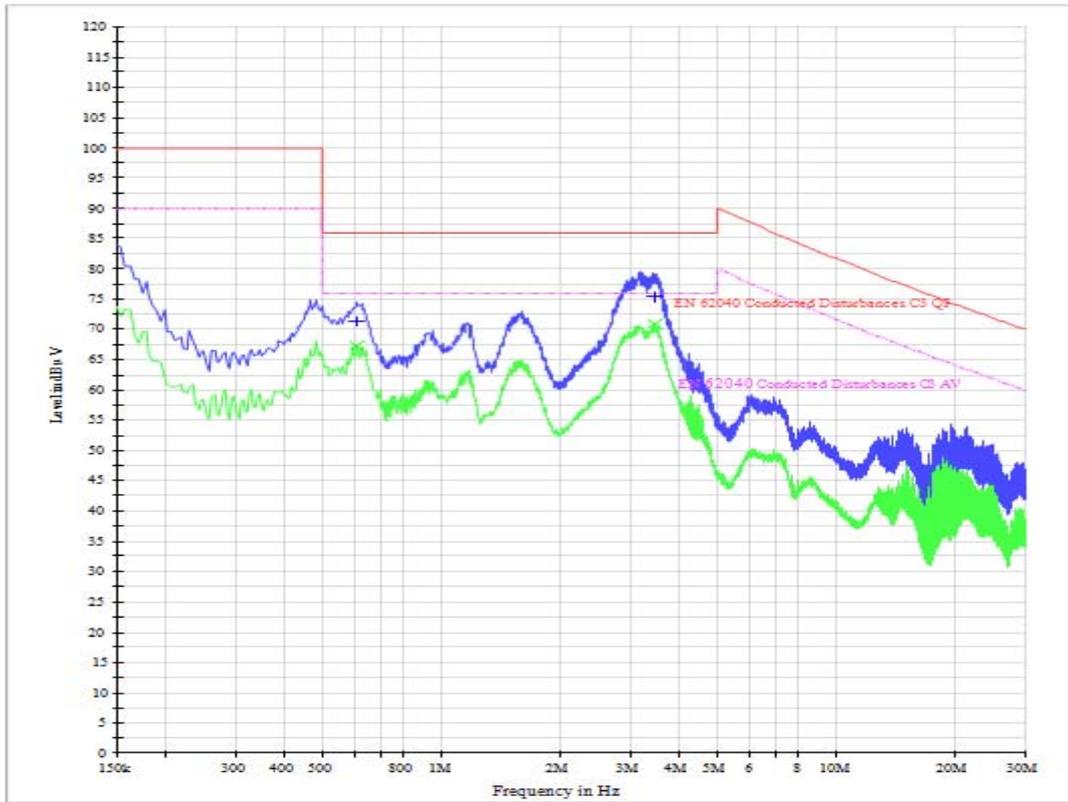

Mains terminal disturbance voltage, N phase

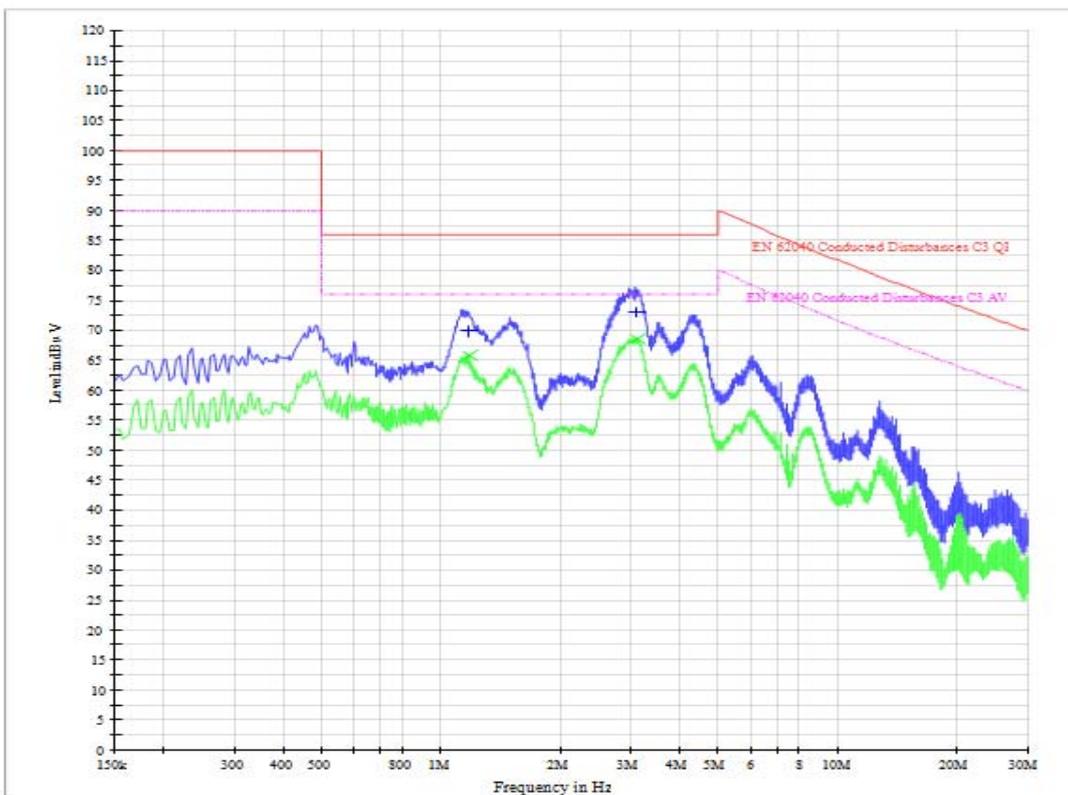

3.3 Radiated Disturbance Measurement


3.3.1 Limits of Radiated Disturbance

Frequency range (MHz)	Quasi peak limits($\text{dB } \mu\text{V/m}$), Category C3 at 10m measurement distance
30 – 230	50
230 - 1000	60

Notes:

- (1) The lower limit shall apply at the transition frequency.
- (2) Additional provisions may be required for cases where interference occurs.

3.3.2 Test Setup

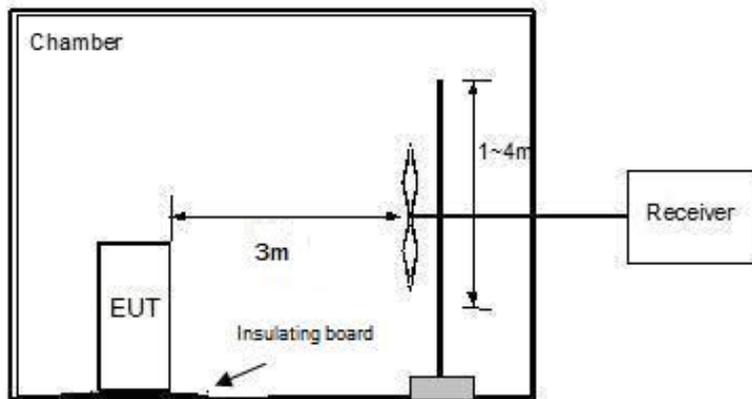

3.3.3 Test Result

60kVA Model 1:

No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits ($\text{dB}\mu\text{V/m}$)	Emission Level ($\text{dB}\mu\text{V/m}$)
1	31.2000	H	400	0	50	31.7
2	113.9200	H	400	0	50	34.8
3	30.2400	V	100	164	50	45.8
4	35.3200	V	100	122	50	42.3
5	111.9600	V	100	0	50	38.3

**60kVA Model 2:**

No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	33.1600	H	400	0	50	28.5
2	113.4400	H	400	0	50	36.9
3	33.4000	V	100	168	50	45.5
4	38.9600	V	100	0	50	38.6
5	111.4800	V	100	0	50	38.2

30kVA Model 1:


No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	200.0000	H	400	0	50	26.1
2	31.6800	V	100	0	50	35.5
3	72.2000	V	100	0	50	28.1

30kVA Model 2:


No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	57.4000	H	400	0	50	24.8
2	150.0400	H	400	0	50	25.0
3	32.9200	V	100	0	50	38.4
4	38.9600	V	100	0	50	35.1
5	57.6400	V	100	0	50	31.5

60kVA Model 1:

1. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Vertical

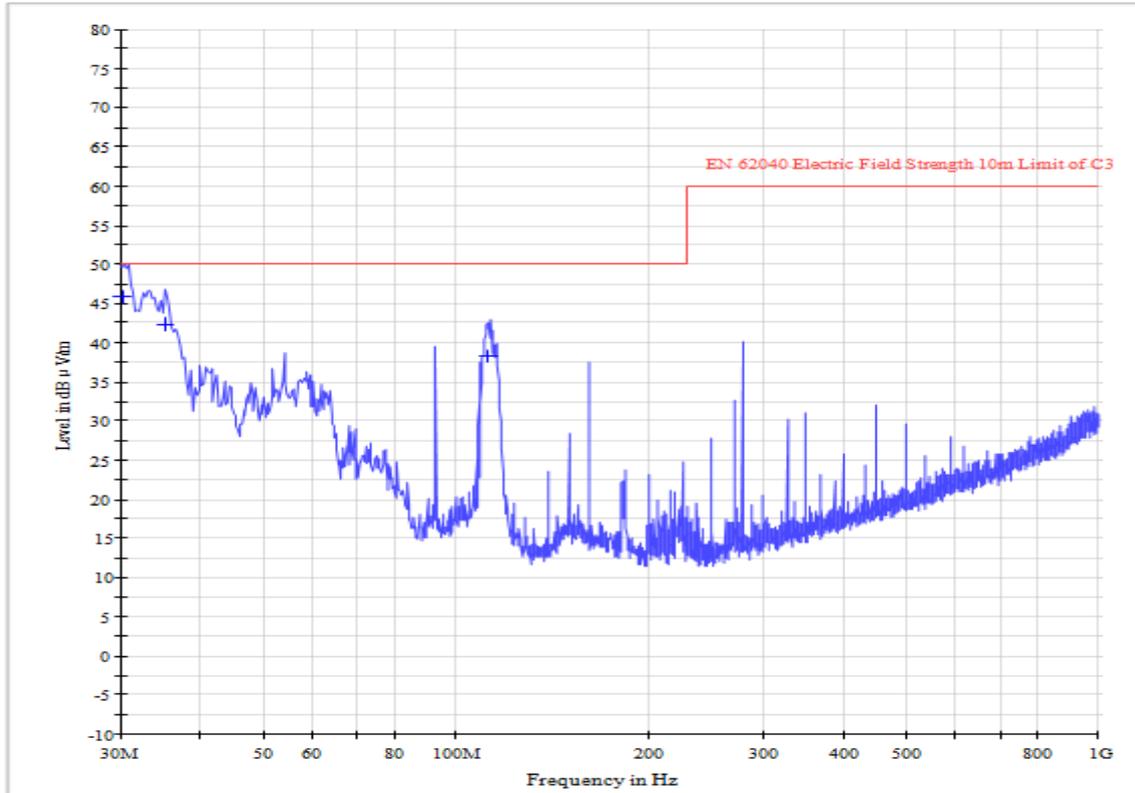


2. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Horizontal

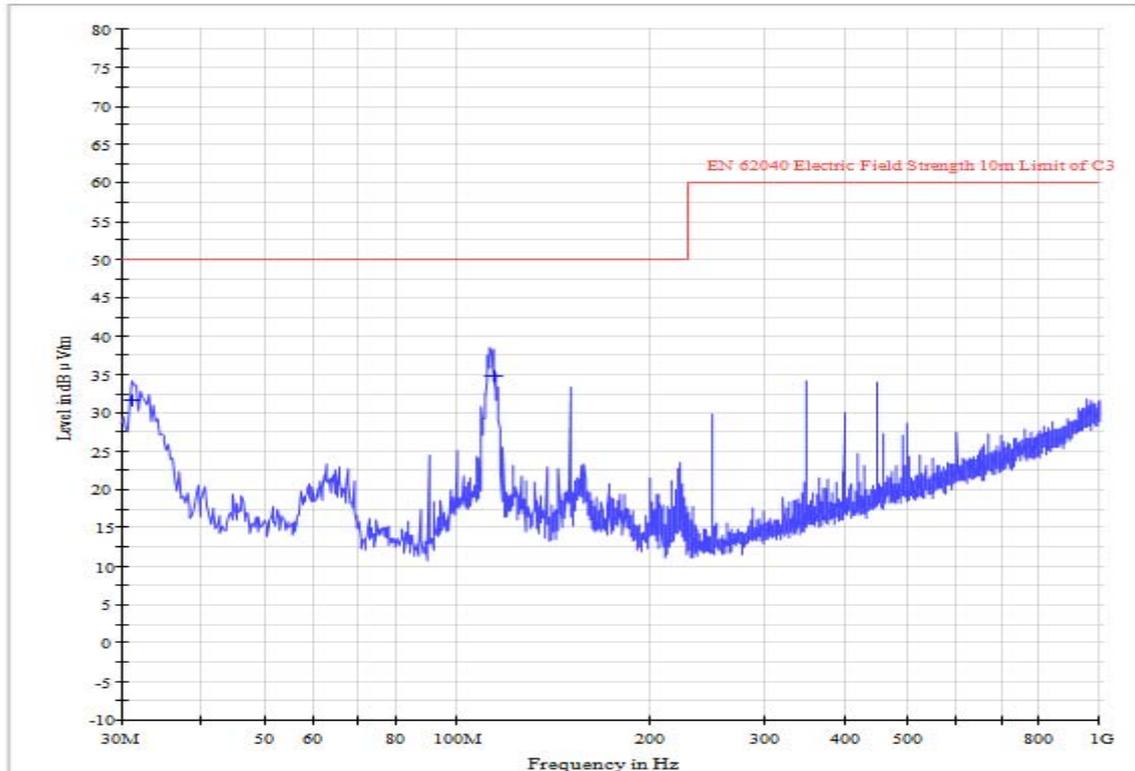


60kVA Model 2:

1. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Vertical

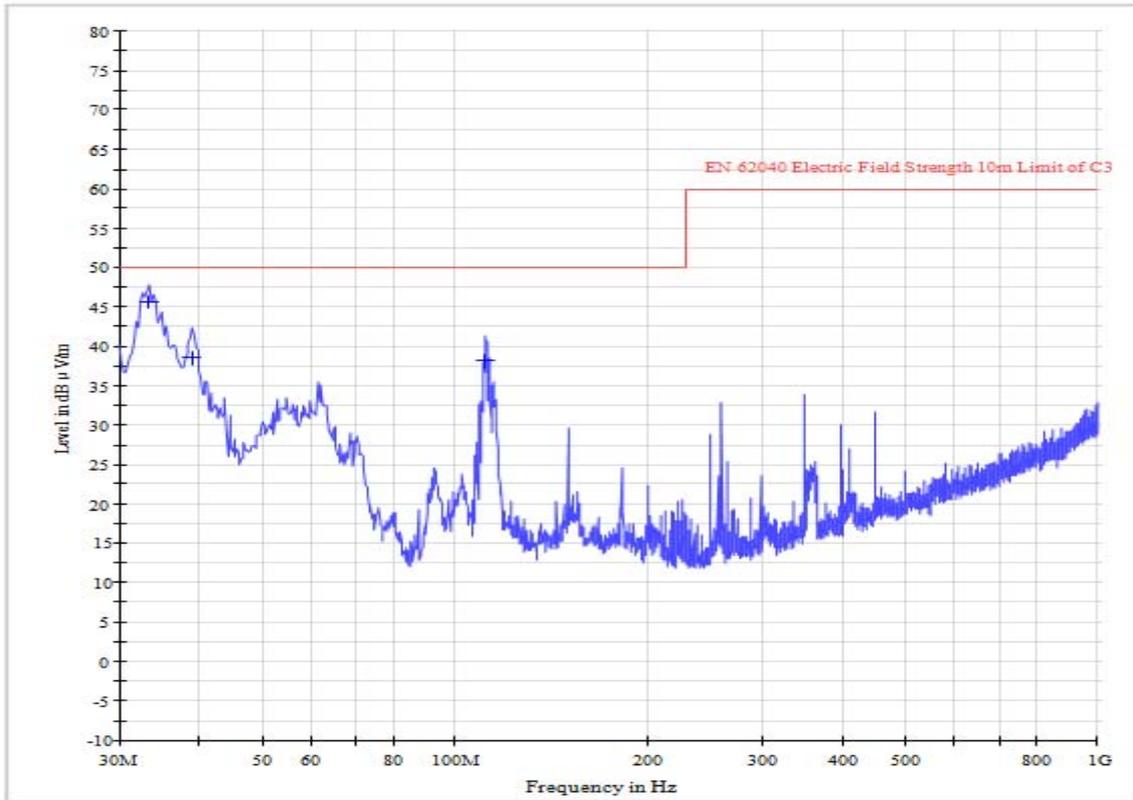


2. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Horizontal

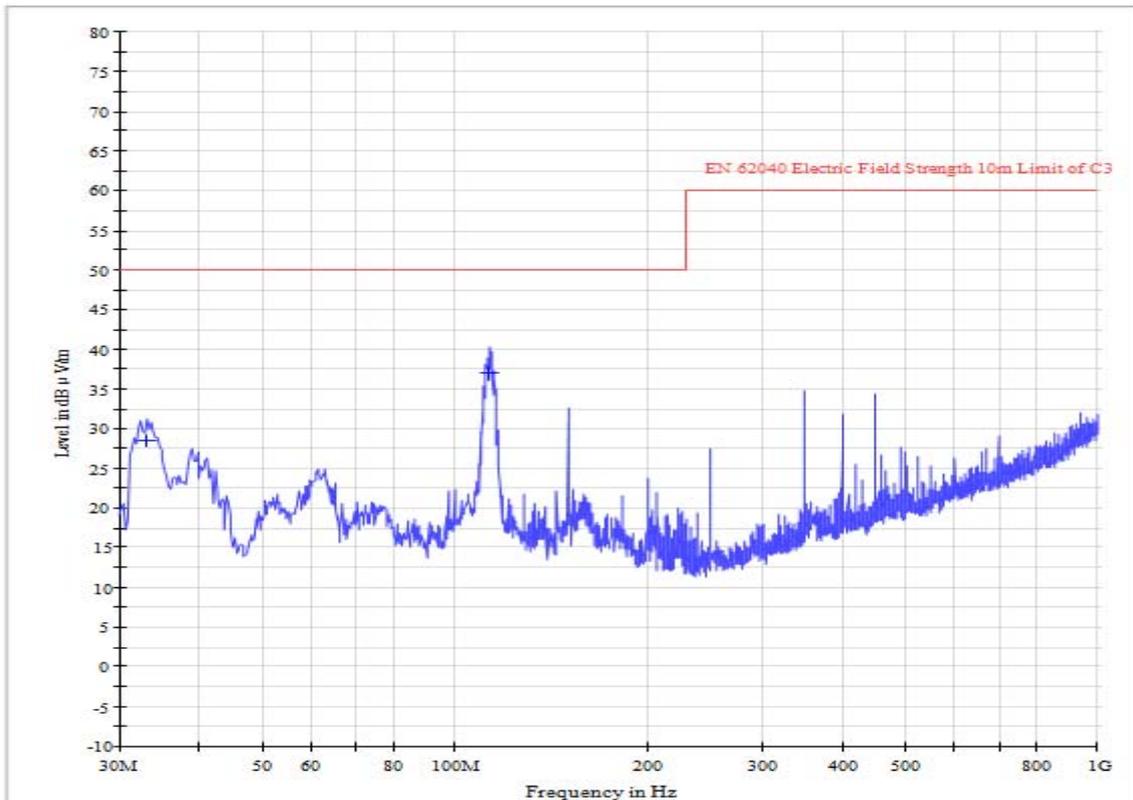


30kVA Model 1:

1. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Vertical

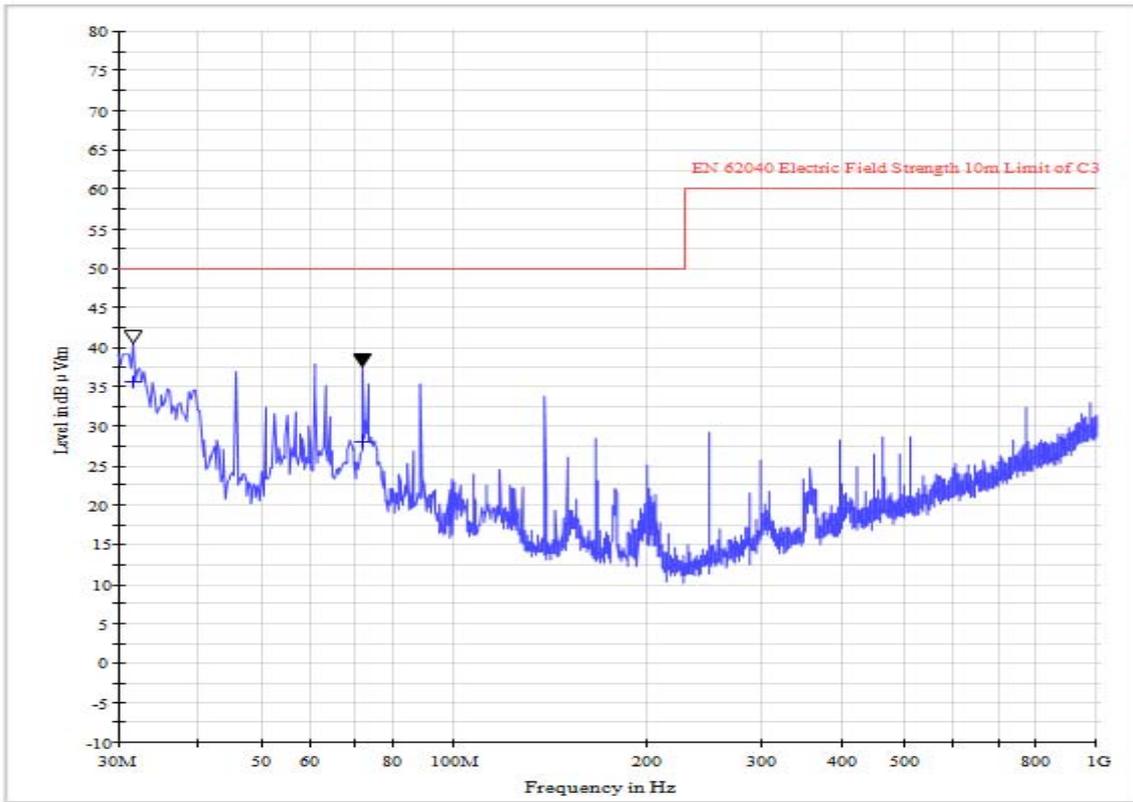


2. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Horizontal

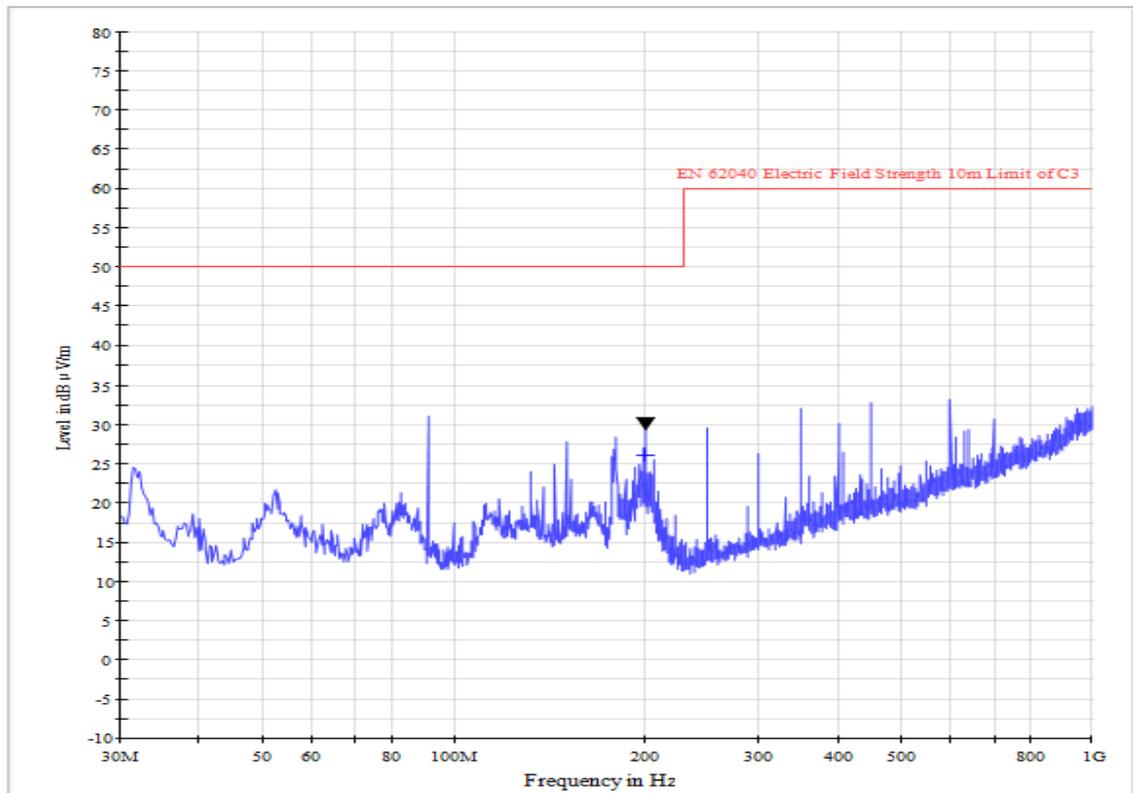


30kVA Model 2:

1. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Vertical

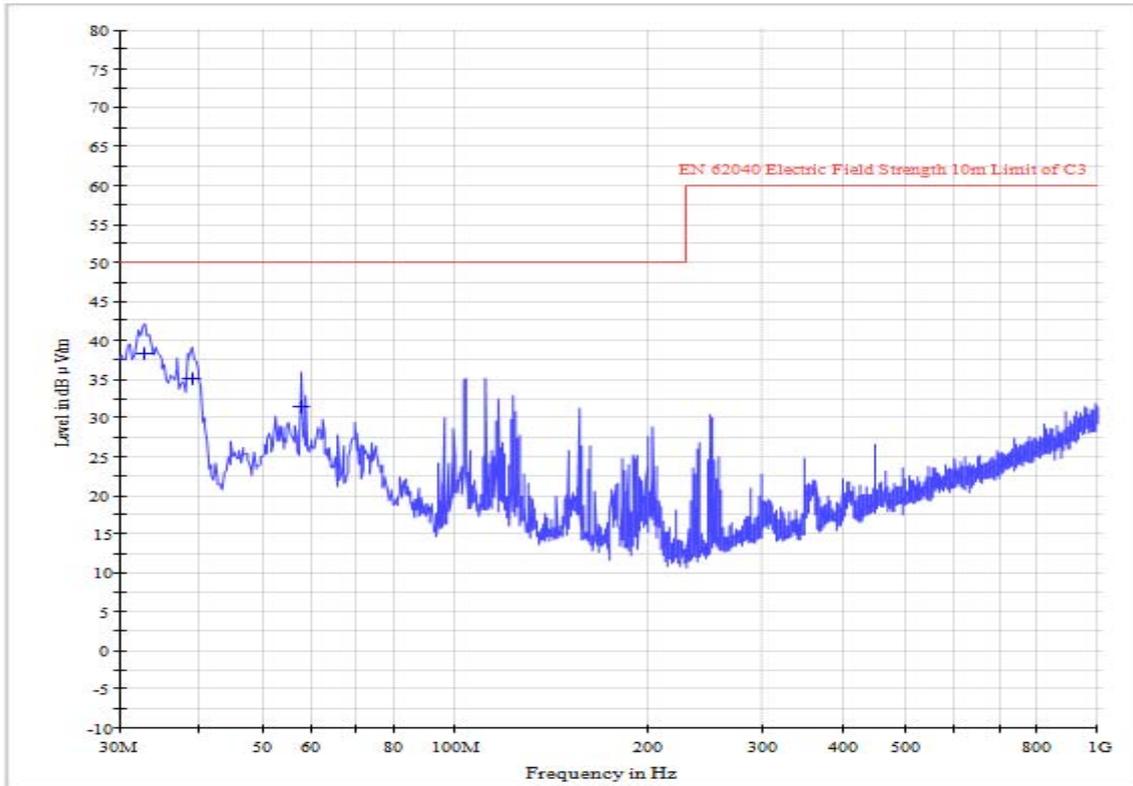

2. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Horizontal

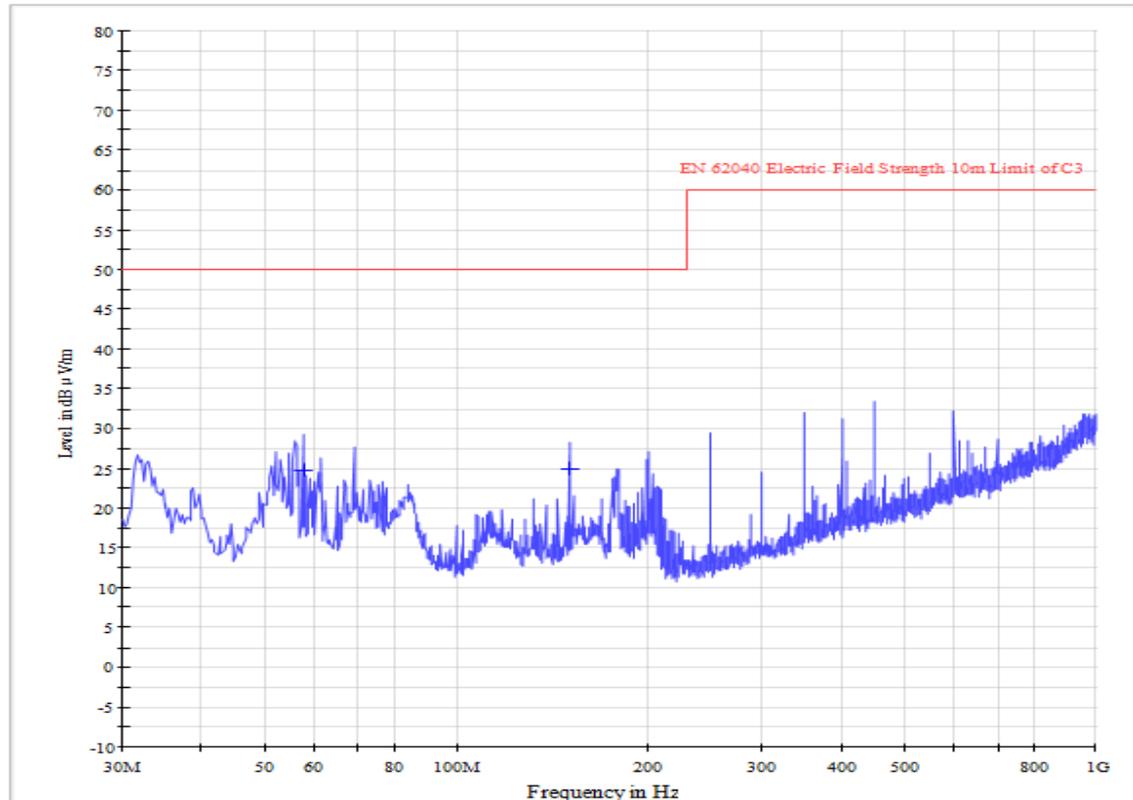



4 Immunity Test

4.1 EUT Setup and Operating Conditions

The EUT was powered by 380VAC mains and continuously operated.

Environment Condition:

Temperature: 24°C; Relative Humidity: 55%; Pressure: 101kPa

Test Date: 2017-03-01~2017-04-07

Test Engineer: Jiang Haibiao

Test Site: EMC Lab

4.2 Performance Criteria


Criterion A	The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
Criterion C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

4.3 Electrostatic Discharge Immunity Test

4.3.1 Test Specification

Basic Standard:	IEC 61000-4-2
Discharge Impedance	330 Ω / 150 pF
Discharge Voltage:	Air Discharge : 8 kV Contact Discharge : 4kV
Polarity:	Positive / Negative
Number of Discharge:	Minimum 20 times at each test point
Discharge Mode:	Single discharge
Discharge Period:	1-second minimum
Criterion:	B

4.3.2 Test Setup

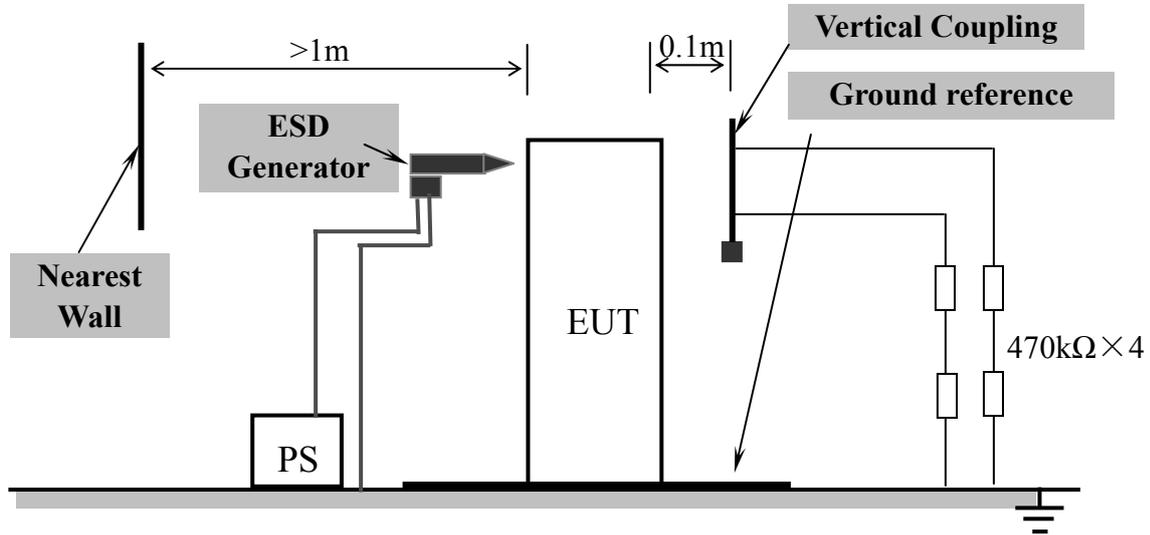

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

4.3.3 Test Result

Test Points	Discharge Level (kV)	Discharge Mode	Observation	Comply with Criterion
Aperture of the cover	±8	Air	Note(1)	A
Screen	±8	Air	Note(1)	A
Button	±8	Air	Note(1)	A
Metallic shell	±4	Contact	Note(1)	A
HCP	±4	Contact	Note(1)	A
VCP	±4	Contact	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.4 Radiated, Radio Frequency Electromagnetic Field Immunity Test

4.4.1 Test Specification

Basic Standard:	IEC 61000-4-3
Frequency Range:	80 MHz – 1000MHz
Field Strength:	10V/m
Modulation:	1kHz sine wave, 80%, AM modulation
Frequency Step:	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance:	3m
Antenna Height:	1.5m
Dwell Time:	3 seconds
Criterion:	A

4.4.2 Test Setup

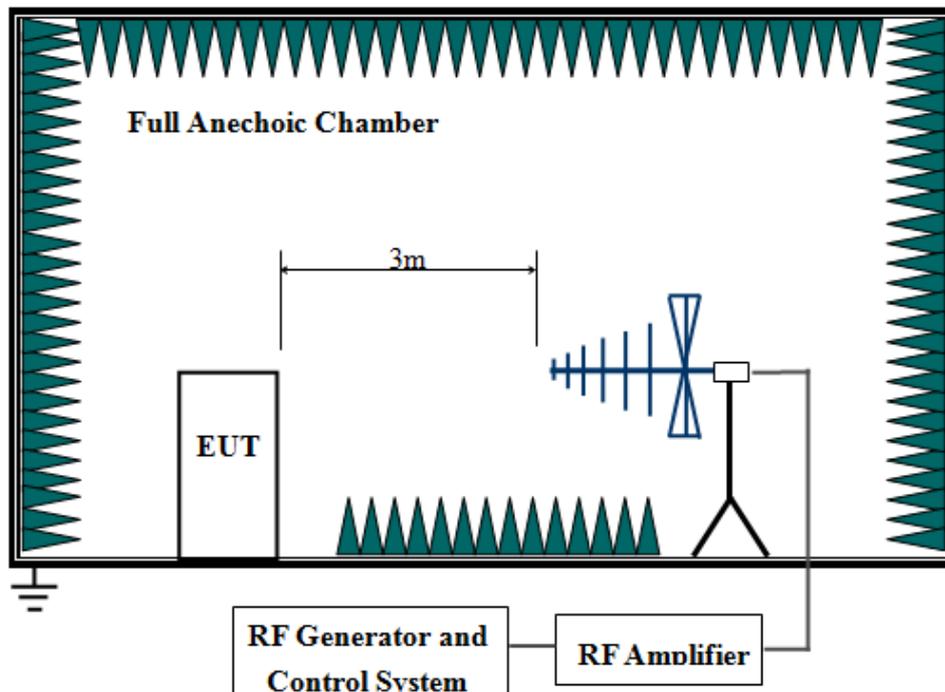

4.4.3 Test Result

Frequency	Polarity	Azimuth	Field Strength (V/m)	Observation	Comply with Criterion
80-1000 MHz	V&H	0,90,180, 270	10	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.5 Electrical Fast Transient/Burst Immunity Test

4.5.1 Test Specification

Basic Standard:	IEC 61000-4-4
Test Voltage:	AC. power port:2 kV
Polarity:	Positive/Negative
Impulse Frequency:	5kHz
Impulse wave shape:	5/50ns
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	Not less than 1 min.
Criterion:	B

4.5.2 Test Setup

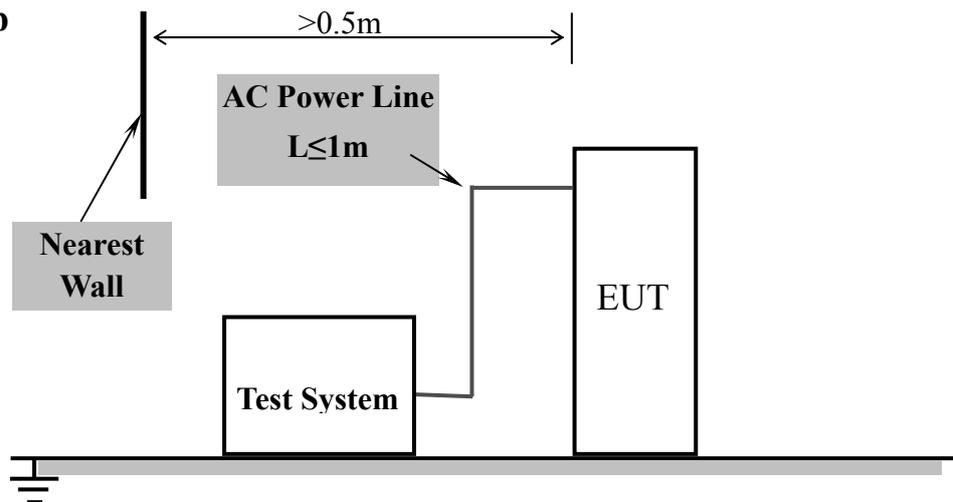

4.5.3 Test Result

Test Point	Polarity	Test Level (kV)	Observation	Comply with Criterion
AC Power Port	+/-	2	Note (1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.6 Surge Immunity Test

4.6.1 Test Specification

Basic Standard:	IEC 61000-4-5
Waveform:	Voltage 1.2/50 μ s; Current 8/20 μ s
Test Voltage:	a.c. power port, line to line 1kV, line to earth 2kV
Polarity:	Positive/Negative
Phase Angle:	0° , 90° , 180° , 270°
Repetition Rate:	60sec
Times:	5 time/each condition.
Criterion:	B

4.6.2 Test Setup

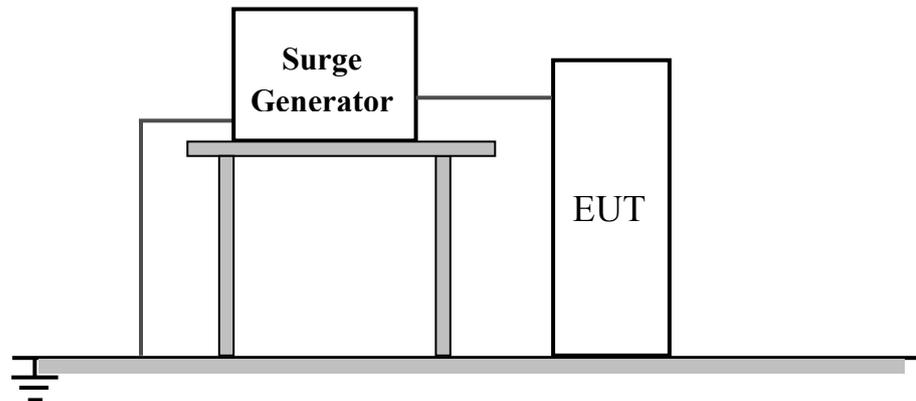

4.6.3 Test Result

Coupling Line	Polarity	Voltage (kV)	Observation	Comply with Criterion
AC power, Line-Line	+/-	1	Note (1)	A
AC power, Line-Earth	+/-	2	Note (1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.7 Immunity to Conducted Disturbances Induced by RF Fields

4.7.1 Test Specification

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 MHz – 80 MHz
Field Strength:	10V
Modulation:	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1% of fundamental
Coupled Cable:	AC. power line
Coupling Device:	Electromagnetic coupling clamp
Criterion:	A

4.7.2 Test Setup

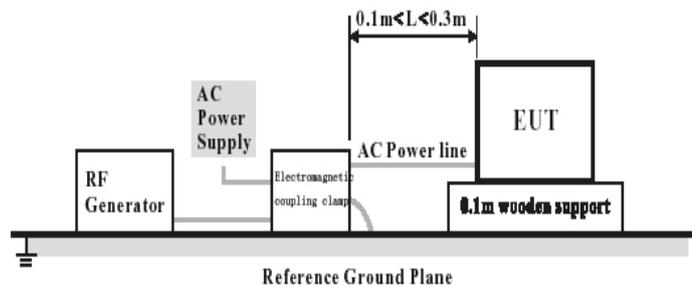

4.7.3 Test Result

Test Point	Frequency	Field Strength (Vrms)	Observation	Comply with criterion
AC power line	0.15 – 80 MHz	10	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.8 Power Frequency Magnetic Field Immunity Test

4.8.1 Test Specification

Basic Standard:	IEC 61000-4-8
Frequency Range:	50Hz
Field Strength:	30A/m
Observation Time:	2 minute
Inductance Coil:	Rectangular type, 1m × 1m
Criterion:	B

4.8.2 Test Setup

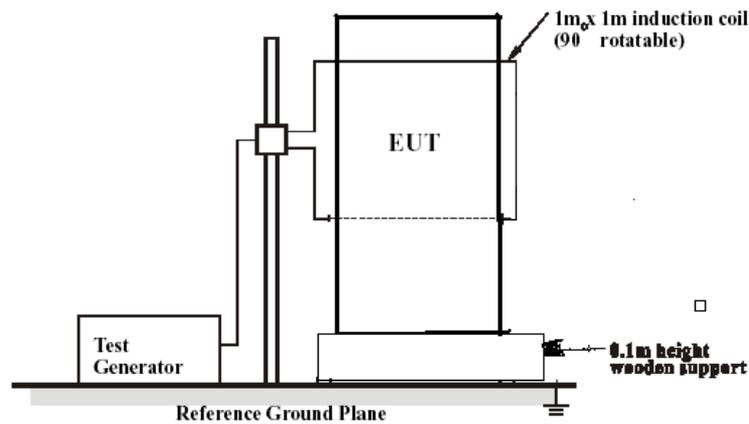

4.8.3 Test Result

Direction	Field Strength(A/m)	Observation	Comply with Criterion
X	30	Note(1)	A
Y	30	Note(1)	A
Z	30	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed

4.9 Power line harmonics and inter-harmonics

4.9.1 Test Specification

Basic Standard:	IEC 61000-2-2
Disturbing Voltage:	10V
Frequency:	140 Hz to 360 Hz
Criterion:	A

4.9.2 Test Setup

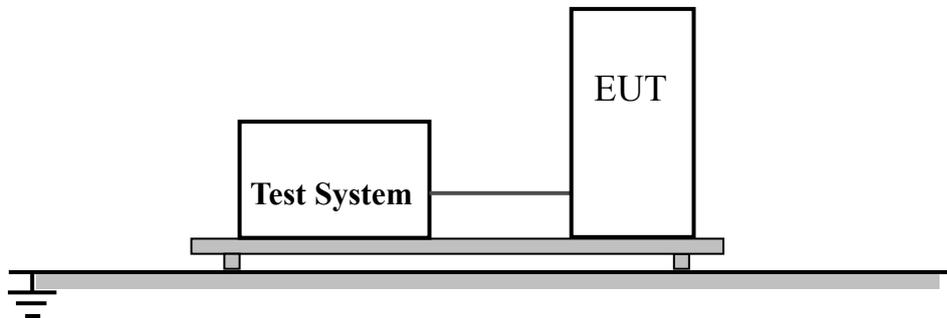

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

4.9.3 Test Result

Phenomenon	Reference document and level	Operating time (min.)	Observation	Comply with Criterion
Harmonics and Interharmonics	IEC 61000-2-4 10V	2.5	Note (1)	A

Note:


- (1). The EUT continued to operate as intended after test. Loss of function was observed.
- (2). The EUT continued to operate as intended after test. Temporary loss of function was observed during test.

4.10 Power line unbalance

4.10.1 Test Specification

Basic Standard:	IEC 61000-2-2
Voltage unbalance:	Level-Class 3, 3% negative sequence component, 10 min durations
Power frequency variation:	±4%
Frequency rate of change:	±2%
Criterion:	A

4.10.2 Test Setup

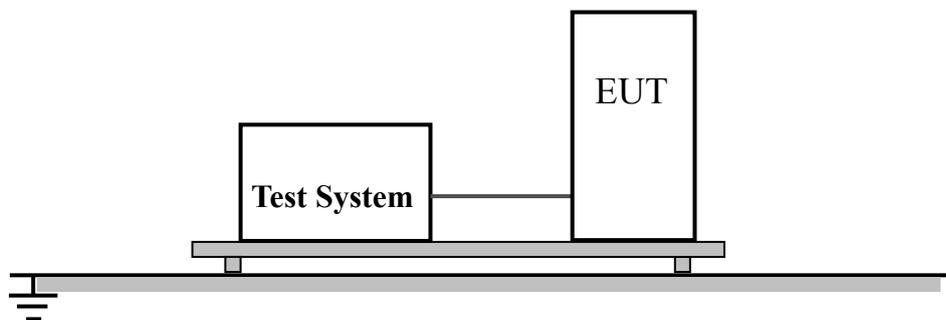

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

4.10.3 Test Result

Phenomenon	Reference document and level	Operating time (min.)	Observation	Comply with Criterion
Voltage unbalance	IEC 61000-2-4 3% negative sequence component	10	Note (1)	A

Note:


- 1) The EUT continued to operate as intended. No degradation of performance was observed.

Appendix I: Photographs of the EUT



Appendix II: Photographs of EMC Test Configuration

1. Mains Terminal Disturbance Voltage Measurement

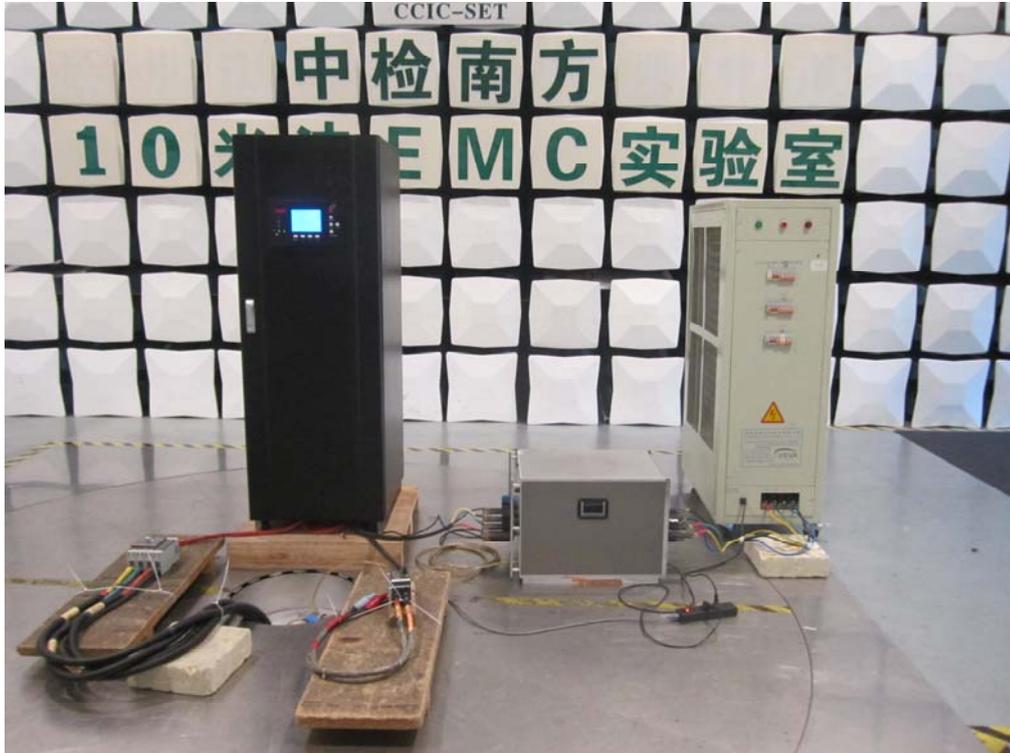

2. Radiated Field Strength Measurement



3. Electrostatic Discharge Immunity Test



4. Radiated, Radio Frequency Electromagnetic Field Immunity Test



5. Electrical Fast Transient/Burst Immunity Test, Surge Immunity Test



6. Immunity to Conducted Disturbances Induced by RF Fields



7. Power Frequency Magnetic Field Immunity Test



8. Power line harmonics and inter-harmonics





STATEMENT

- 1. The test report is invalid without stamp of laboratory.**
- 2. The test report is invalid without signature of person(s) testing and authorizing.**
- 3. The test report is invalid if erased and corrected.**
- 4. Test results of the report are valid to the test samples if sampling by client.**
- 5. “☆” project was not maintained by CNAS recognition and CMA.**
- 6. The test report shall not be reproduced except in full, without written approval of the laboratory.**
- 7. If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.**

Address: Electronic Testing Building, No. 43 Shahe Road, Xili Jiedao, Nanshan District, 518055

Shenzhen, Guangdong, China

P.C.: 518055

TEL: 0755-26628093, 26627338

FAX: 0755-26627238

Internet: <http://www.ccic-set.com>

E-Mail: manager@ccic-set.com