



EMC TEST REPORT

Report No.: SET2017-08133

Product: Off-Grid Solar Inverter

Model No: 80kVA, 100kVA, 120kVA

Applicant: EAST Group Co., Ltd.

Address: No.6 Northern Industry Road, Songshan Lake Sci. & Tech.
Industrial Park, Dongguan City, Guangdong Province, China

Issued by: CCIC Southern Electronic Product Testing (Shenzhen)CO., Ltd.

Lab location: Electronic Testing Building, No. 43 Shahe Road, Xili Jiedao,
Nanshan District, 518055 Shenzhen, Guangdong, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238



This test report consists of 34 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Report

Product.....: Off-Grid Solar Inverter
Model No.: 80kVA, 100kVA, 120kVA
Brand Name.....: ----
Applicant.....: EAST Group Co., Ltd.
Applicant Address.....: No.6 Northern Industry Road, Songshan Lake Sci. & Tech. Industrial Park, Dongguan City, Guangdong Province, China
Manufacturer.....: EAST Group Co., Ltd.
Manufacturer Address.....: No.6 Northern Industry Road, Songshan Lake Sci. & Tech. Industrial Park, Dongguan City, Guangdong Province, China
Test Standards.....: **EN 62040-2:2006+AC:2006 (IEC 62040-2:2005)**
Uninterruptible power systems (UPS) - Part 2:
Electromagnetic compatibility (EMC) requirements

Test Result.....: Pass

Tested by

Jiang Haibiao

Jun 15, 2017

Signature, Date

Reviewed by.....:

Lu-Tongzhou

Jun. 15, 2017

Signature, Date

Approved by.....:

Smartli

Jun. 15, 2017

Signature, Date



Table of Contents

Report.....	2
Table of Contents	3
1 General Information.....	6
1.1 Description of EUT	6
1.2 Objective	6
2 Test Facilities and Configuration	6
2.1 Environmental Conditions	6
2.2 Measurement Uncertainty	7
2.3 Test Standards and Results	7
2.4 List of Equipments Used.....	8
3 Emission Test	9
3.1 EUT Setup and Operating Conditions.....	9
3.2 Mains Terminal Disturbance Voltage Measurement	9
3.2.1 Limits of Mains Terminal Disturbance Voltage	9
3.2.2 Test Setup	9
3.2.3 Test Result	10
3.3 Radiated Disturbance Measurement	17
3.3.1 Limits of Radiated Disturbance	17
3.3.2 Test Setup	17
3.3.3 Test Result	17
4 Immunity Test	20
4.1 EUT Setup and Operating Conditions.....	20
4.2 Performance Criteria	20
4.3 Electrostatic Discharge Immunity Test	20
4.3.1 Test Specification	20



4.3.2 Test Setup	21
4.3.3 Test Result	21
4.4 Radiated, Radio Frequency Electromagnetic Field Immunity Test	22
4.4.1 Test Specification	22
4.4.2 Test Setup	22
4.4.3 Test Result	23
4.5 Electrical Fast Transient/Burst Immunity Test	23
4.5.1 Test Specification	23
4.5.2 Test Setup	23
4.5.3 Test Result	24
4.6 Surge Immunity Test	24
4.6.1 Test Specification	24
4.6.2 Test Setup	24
4.6.3 Test Result	24
4.7 Immunity to Conducted Disturbances Induced by RF Fields	25
4.7.1 Test Specification	25
4.7.2 Test Setup	25
4.7.3 Test Result	25
4.8 Power Frequency Magnetic Field Immunity Test	26
4.8.1 Test Specification	26
4.8.2 Test Setup	26
4.8.3 Test Result	26
4.9 Power line harmonics and inter-harmonics	27
4.9.1 Test Specification	27
4.9.2 Test Setup	27
4.9.3 Test Result	27



4.10 Power line unbalance	28
4.10.1 Test Specification	28
4.10.2 Test Setup	28
4.10.3 Test Result	28
Appendix I: Photographs of the EUT.....	29
Appendix II: Photographs of EMC Test Configuration	30



1 General Information

1.1 Description of EUT

Product: Off-Grid Solar Inverter

Model No.: 120kVA

Brand Name: ----

Serial No.: /

Rating: PV input : 350-750Vdc, 6*60A max

DC input: 360Vdc

AC Input: 380Vac, 3Φ+N+PE, 50/60Hz, 250A

AC Output: 380Vac, 3Φ+N+PE, 50/60Hz, 180A

Output Power: 108kW.

Accessories: /

NOTE:

1. The EUT belongs to Category C3, intended to be used in the second environment. The following warning shall be included in the instruction for use:

Warning

In a domestic environment this product may cause radio interference in which case supplementary mitigation measures may be required.

2. Model 80kVA, 100kVA, and 120kVA have the same circuit and structure. Models differ only on their electrical rating and power component. According to the differences, all tests were performed on model 120kVA, Test results of covering other models.
3. For more detailed features description about the EUT, please refer to User's Manual.

1.2 Objective

Perform Electro Magnetic Interference (EMI) and Electro Magnetic Susceptibility (EMS) tests for CE Marking.

2 Test Facilities and Configuration

2.1 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

2.2 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in Measurement” (GUM) published by ISO.

- Uncertainty of Conducted Emission, $U_c = \pm 3.6\text{dB}$
- Uncertainty of Radiated Emission, $U_c = \pm 5.0\text{dB}$

2.3 Test Standards and Results

The EUT has been tested according to the following specifications:

EMISSION		
Standard	Test Type	Result
EN 62040-2:2006+AC:2006 IEC 62040-2:2005	Mains terminal disturbance voltage	PASS
	Radiated disturbance	PASS
IMMUNITY (EN 62040-2:2006+AC:2006, IEC 62040-2:2005)		
Basic Standard	Test Type	Result
IEC 61000-4-2:1995	Electrostatic discharge immunity	PASS
IEC 61000-4-3:2002	Radiated, radio frequency electromagnetic field immunity	PASS
IEC 61000-4-4:2004	Electrical fast transient/burst immunity	PASS
IEC 61000-4-5:1995	Surge immunity	PASS
IEC 61000-4-6:2003	Immunity to conducted disturbances induced by RF fields	PASS
IEC 61000-4-8:1993	Power frequency magnetic field immunity	PASS
IEC 61000-2-2:2002	Power line harmonics and inter-harmonics/ Power line unbalance	PASS



2.4 List of Equipments Used

Description	Manufacturer	Model No.	Calibration Due Date	Serial No.
Test Receiver	ROHDE&SCHWARZ	ESCI	Jun.05, 2018	A130901474
LISN	SCHWARZBECK	NNLK8130	Jun.05, 2018	A131001541
Broadband Ant.	SCHWARZBECK	VULB 09160	May.25,2019	A0805560
ESD Test System	EM TEST	ESD30C	Jun.13, 2018	A0712513
EFT/Surge Test System	EM TEST	UCS500N7.7	Nov. 06, 2017	A130201094
	EM TEST	CNI503B9.3	Nov. 06, 2017	A130201095
EMS Antenna	Amplifier Research	BBHA 9120 J	Mar.09, 2019	A160322002
	Amplifier Research	AM 9144	Jan.28, 2018	A151002436
Signal Generator	ROHDE&SCHWARZ	SMB100A	Nov.02, 2017	A141002004
Power Amplifier	MILMEGA	80RF1000-1000	Mar.29,2018	A140101634
	MILMEGA	AS0104R-800/400	Mar.29,2018	A160322001
Power Meter	Amplifier Research	E4417A	Nov.02, 2017	A140701873
CDN	TESEQ	CDN M5	May.29,2018	A161102606
Power Amplifier	TESEQ	NSG4070	May.29,2018	A160602544
Anechoic Chamber	Albatross	EMC 19.6*11.8*8.5 5(m)	May.27, 2019	A0802520
AC Power source	Chroma	Chroma 61860	Jan.20, 2018	A150202185
Magnetic Field Tester	HAEFELY	MAG 100.1	Jun.05, 2018	A0103109

NOTE: Equipment above has been calibrated and is in the period of validation.

3 Emission Test

3.1 EUT Setup and Operating Conditions

Mode 1: The EUT was powered by 380VAC mains, was continuously operated.

Mode 2: The EUT was powered by 540VDC mains, was continuously operated.

Environment Condition:

Temperature: 24°C; Relative Humidity: 55%; Pressure: 101kPa

Test Date: 2017-04-07

Test Engineer: Jiang Haibiao

Test Site: EMC Lab

3.2 Mains Terminal Disturbance Voltage Measurement


3.2.1 Limits of Mains Terminal Disturbance Voltage

Frequency range (MHz)	Limits (dB μ V), Category C3	
	Quasi-peak	Average
0.15 - 0.5	130	120
0.5 - 5	125	115
5-30	115	105

NOTE:

1. The lower limit shall apply at the transition frequencies.

3.2.2 Test Setup

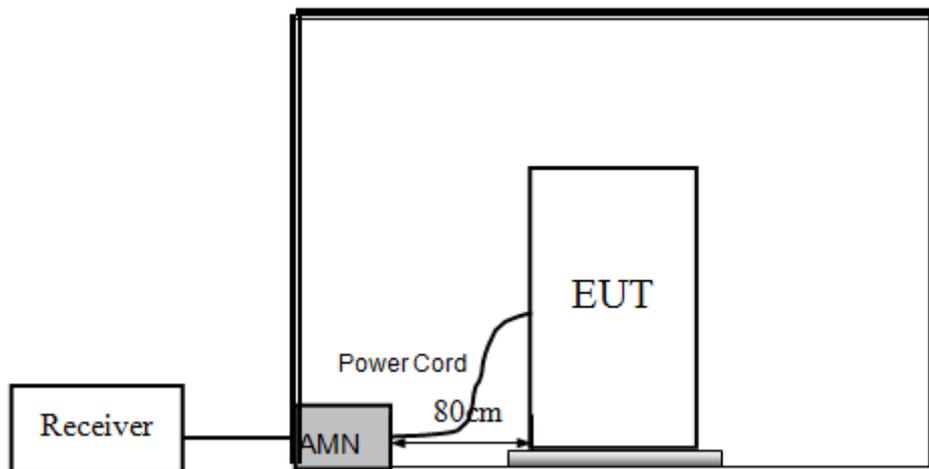

3.2.3 Test Result


No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
120kVA Mode 1 @ AC input:					
1	0.522	125	115	79.3	67.4
2	2.646	125	115	81.7	77.0
3	3.350	125	115	83.3	78.5
4	3.406	125	115	71.9	66.8
5	4.374	125	115	75.3	70.9
6	4.670	125	115	63.9	60.4
120kVA Mode 1 @ AC output:					
1	0.458	130	120	82.1	65.1
2	0.506	125	115	80.4	67.3
3	2.646	125	115	73.9	69.6
4	3.334	125	115	74.6	69.9
5	4.366	125	115	68.6	63.9
6	7.150	115	105	65.8	56.0
120kVA Mode 2 @ AC output:					
1	0.426	130	120	77.9	74.4
2	2.658	125	115	82.0	77.3
3	3.402	125	115	72.1	67.4
4	3.330	125	115	84.5	79.9
5	4.354	125	115	75.8	71.2

NOTE:


1. QP and AV are abbreviations of the quasi-peak and average individually.
2. If the emission levels measured with QP detector are lower than AV limits, there is unnecessary to measure with AV detector.
3. The emission levels recorded above is the larger ones of each phase.

120kVA Mode 1 AC input:


Mains terminal disturbance voltage, L1 phase

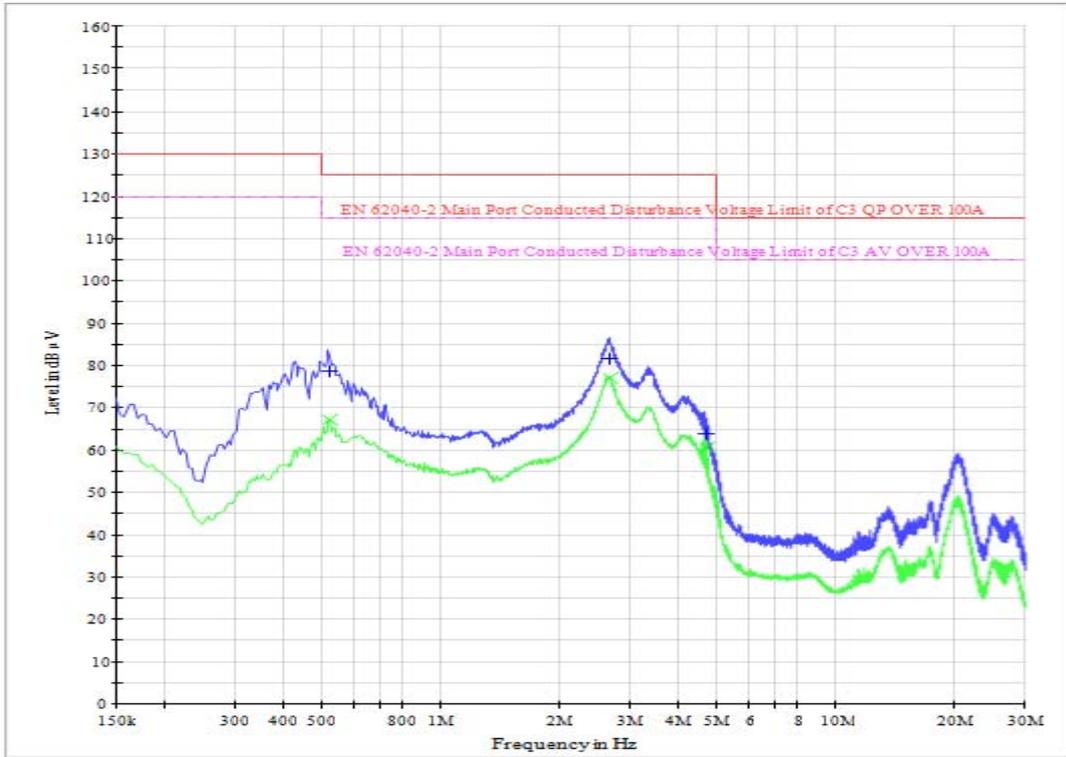


Mains terminal disturbance voltage, L2 phase

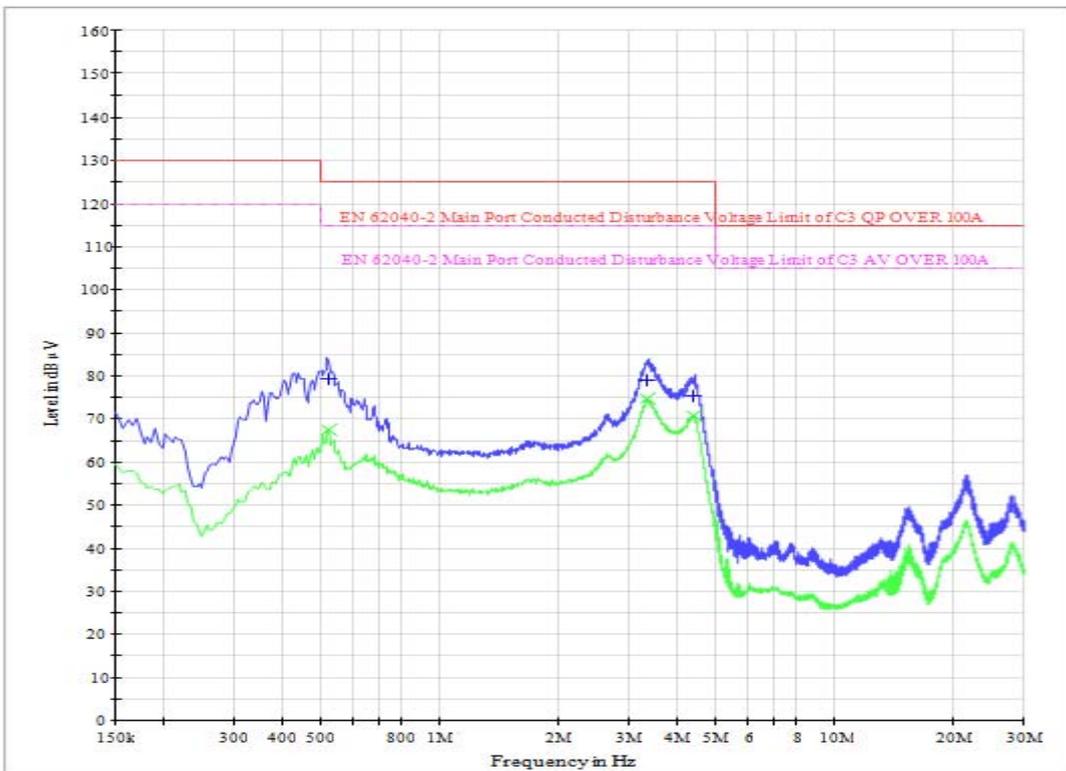

Mains terminal disturbance voltage, L3 phase

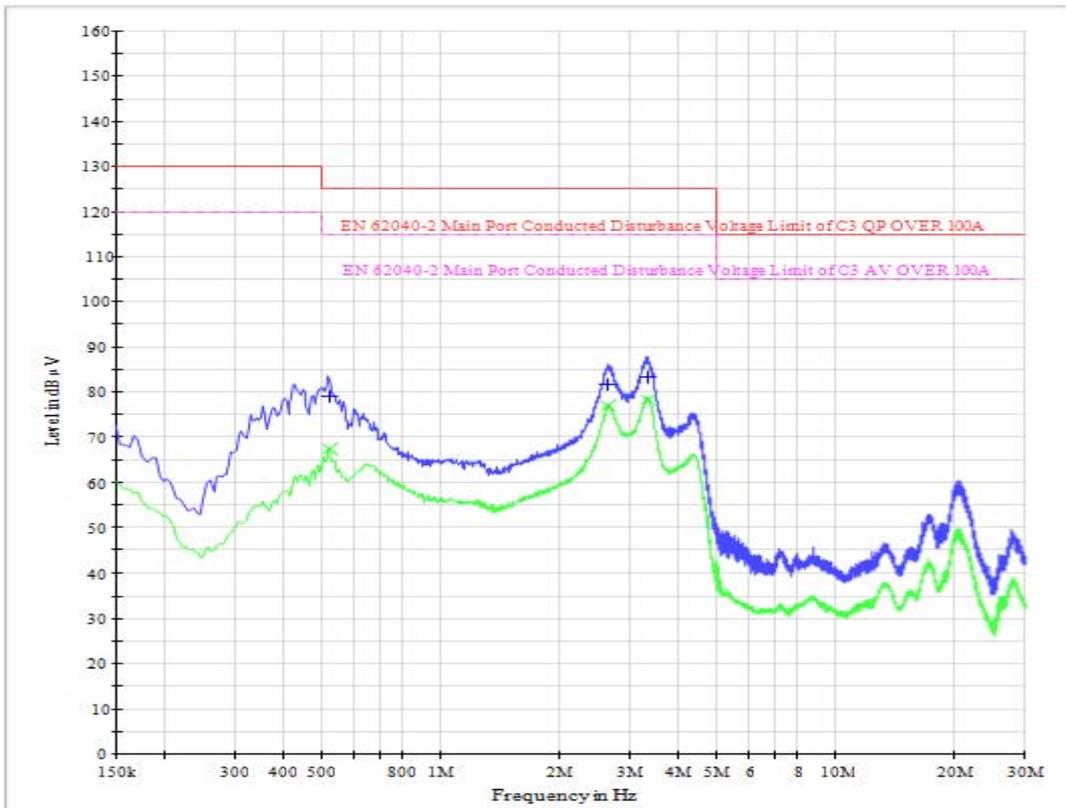


Mains terminal disturbance voltage, N phase

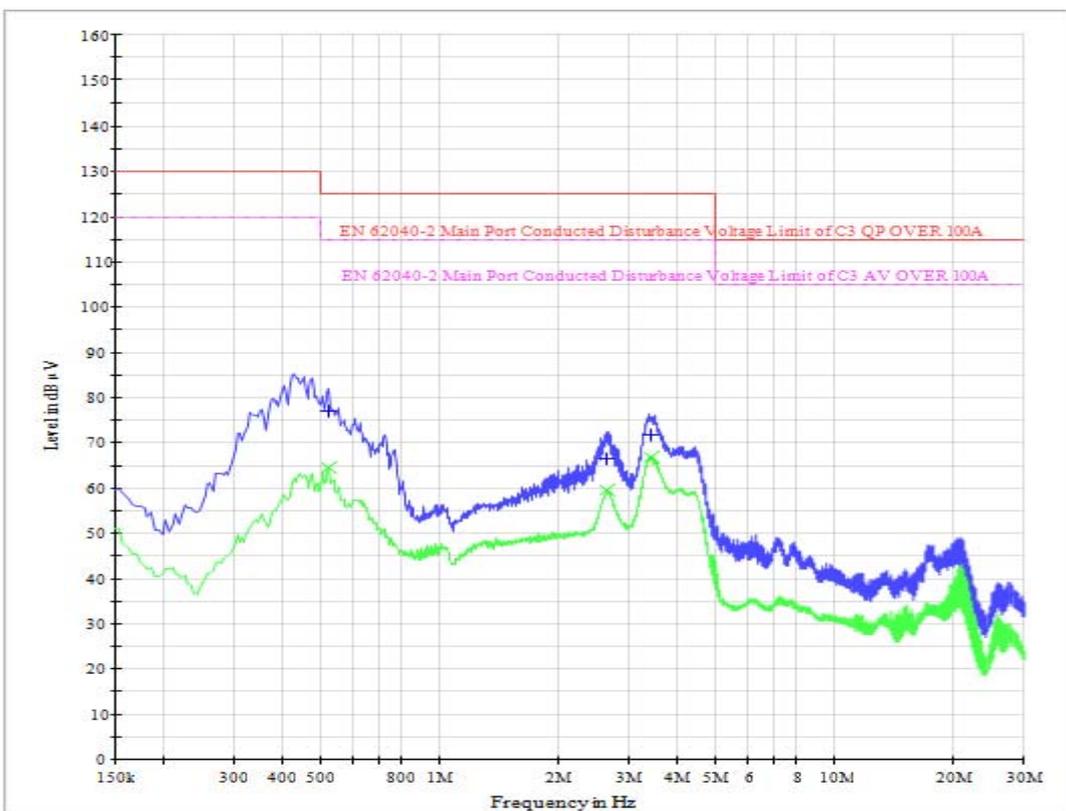


120kVA Mode 1 AC output:


Mains terminal disturbance voltage, L1 phase

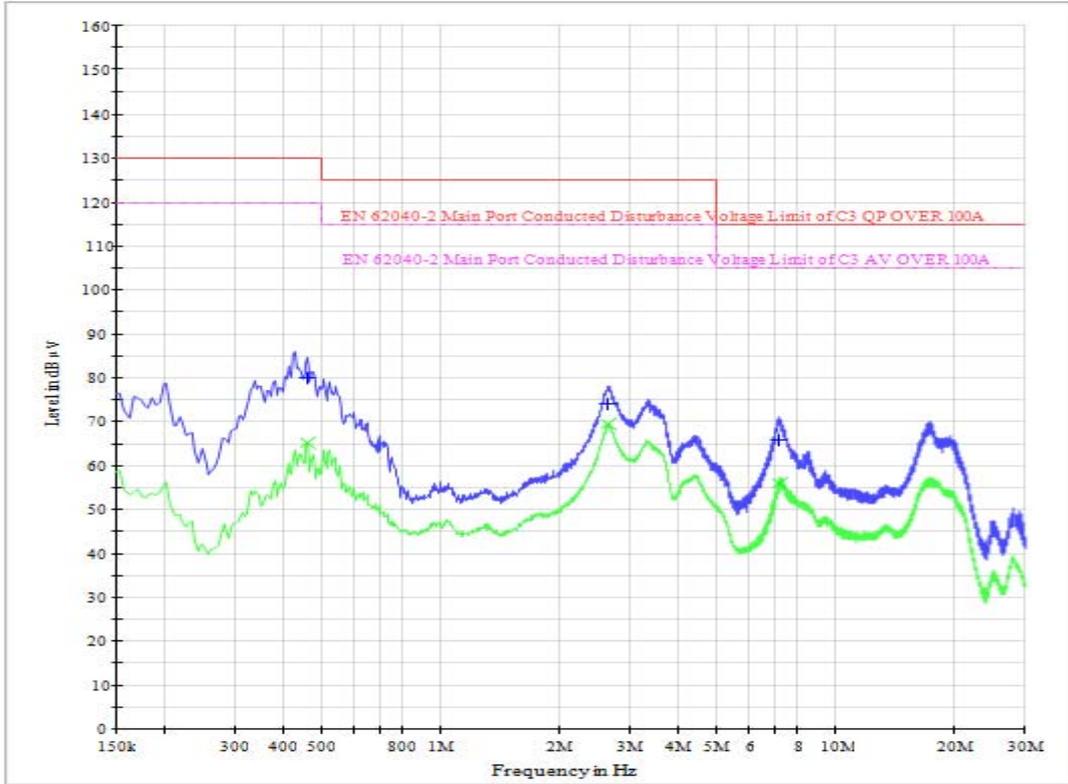


Mains terminal disturbance voltage, L2 phase

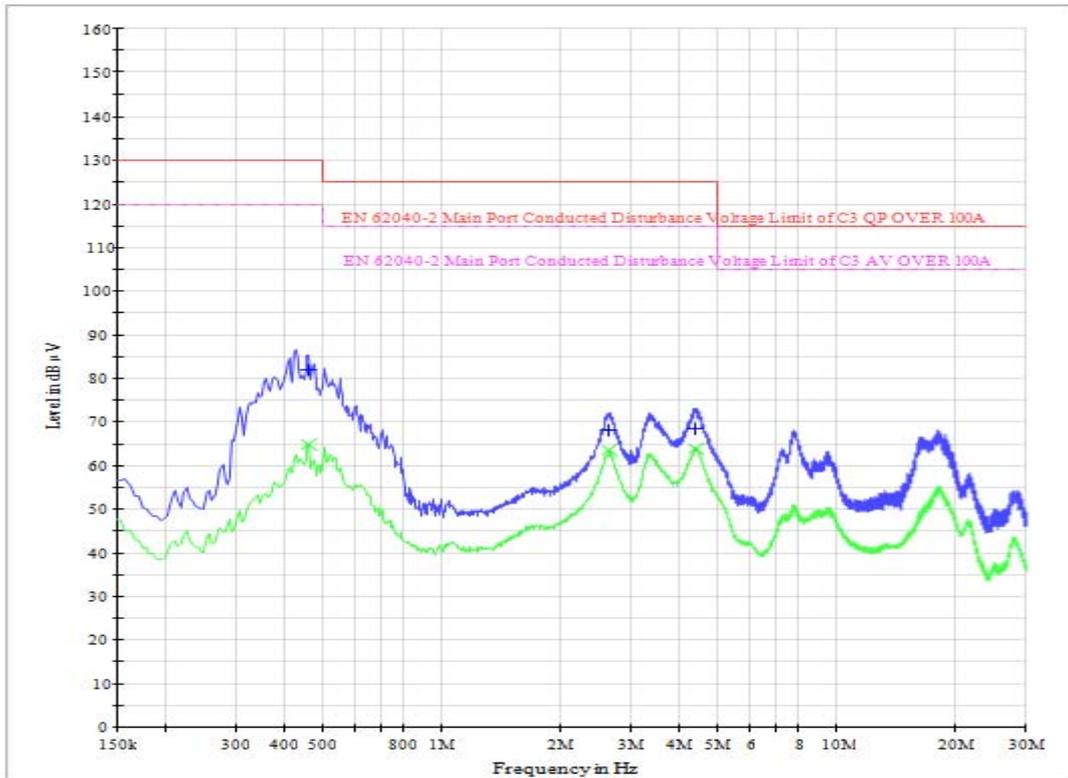

Mains terminal disturbance voltage, L3 phase

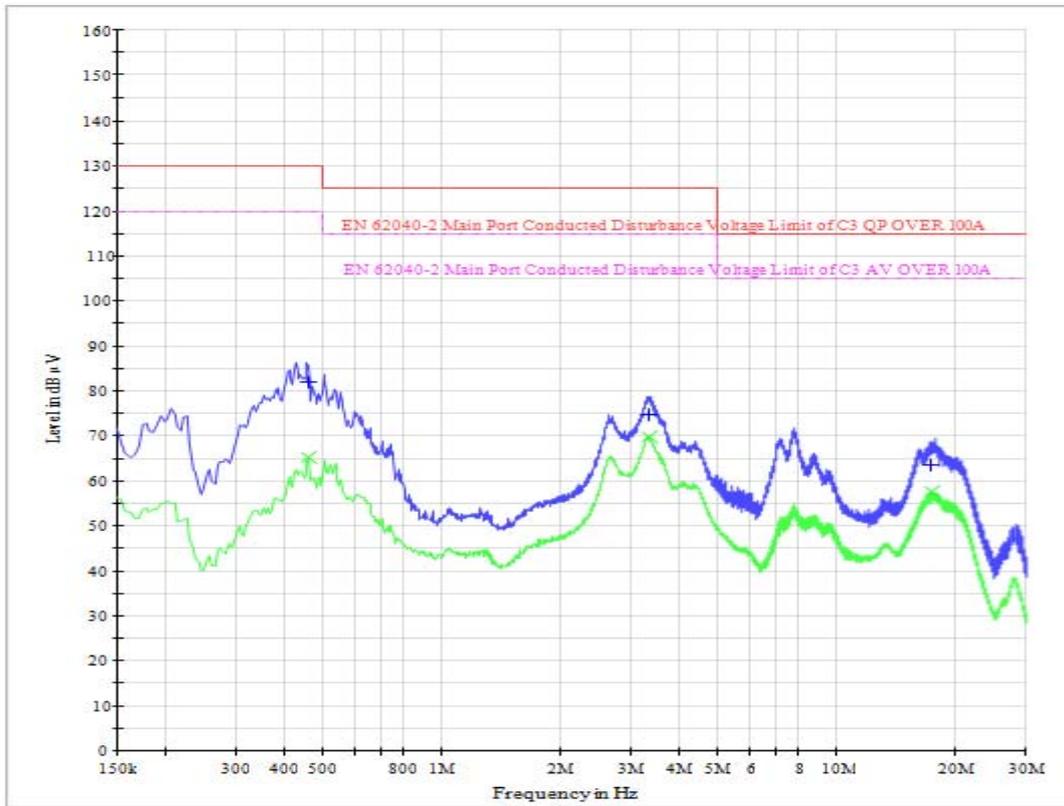


Mains terminal disturbance voltage, N phase

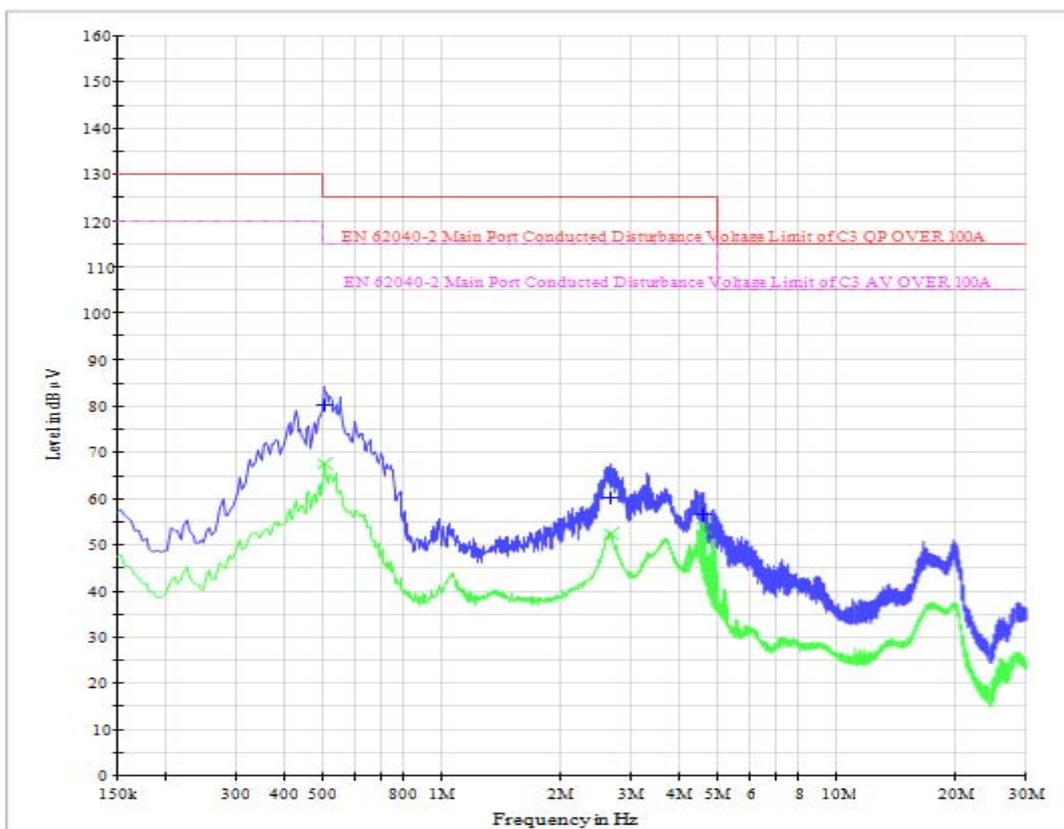


120kVA Mode 2 AC output:


Mains terminal disturbance voltage, L1 phase

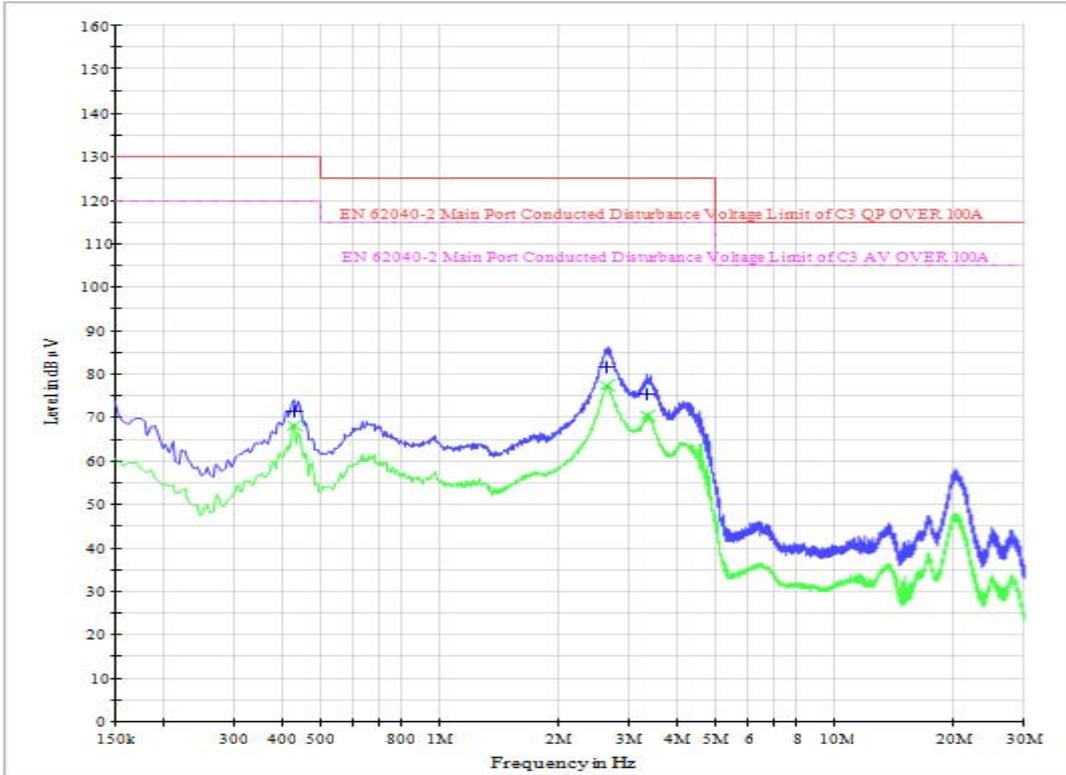


Mains terminal disturbance voltage, L2 phase

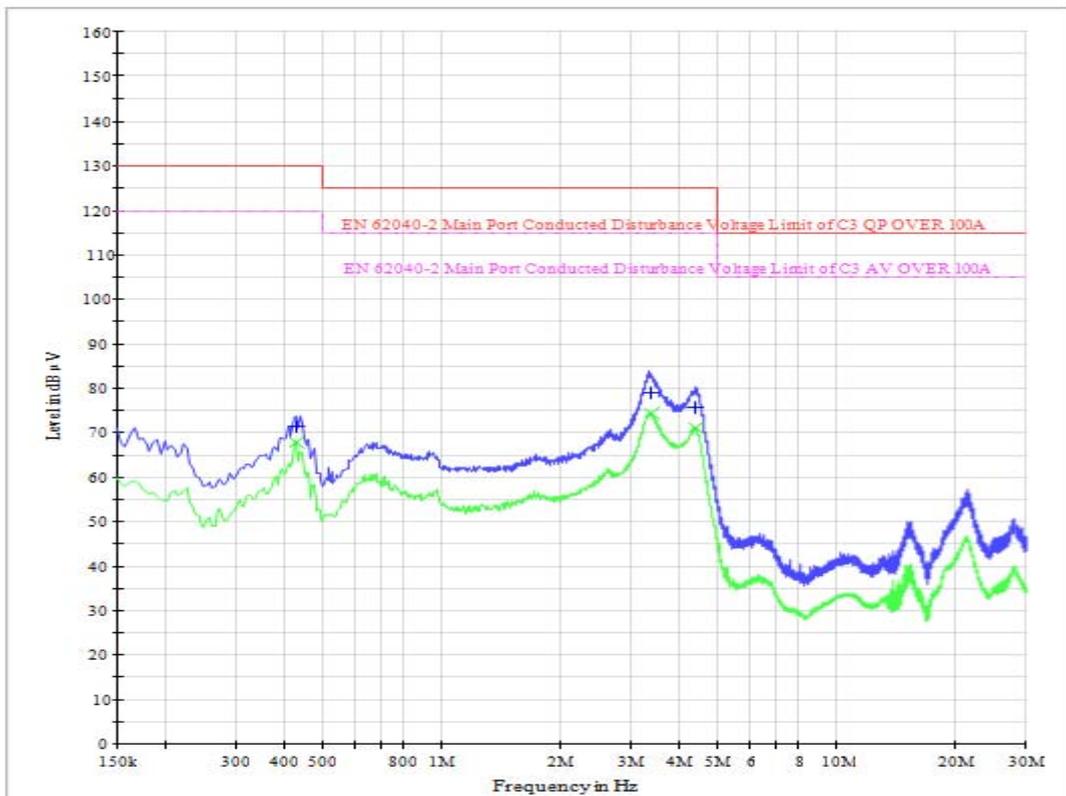

Mains terminal disturbance voltage, L3 phase

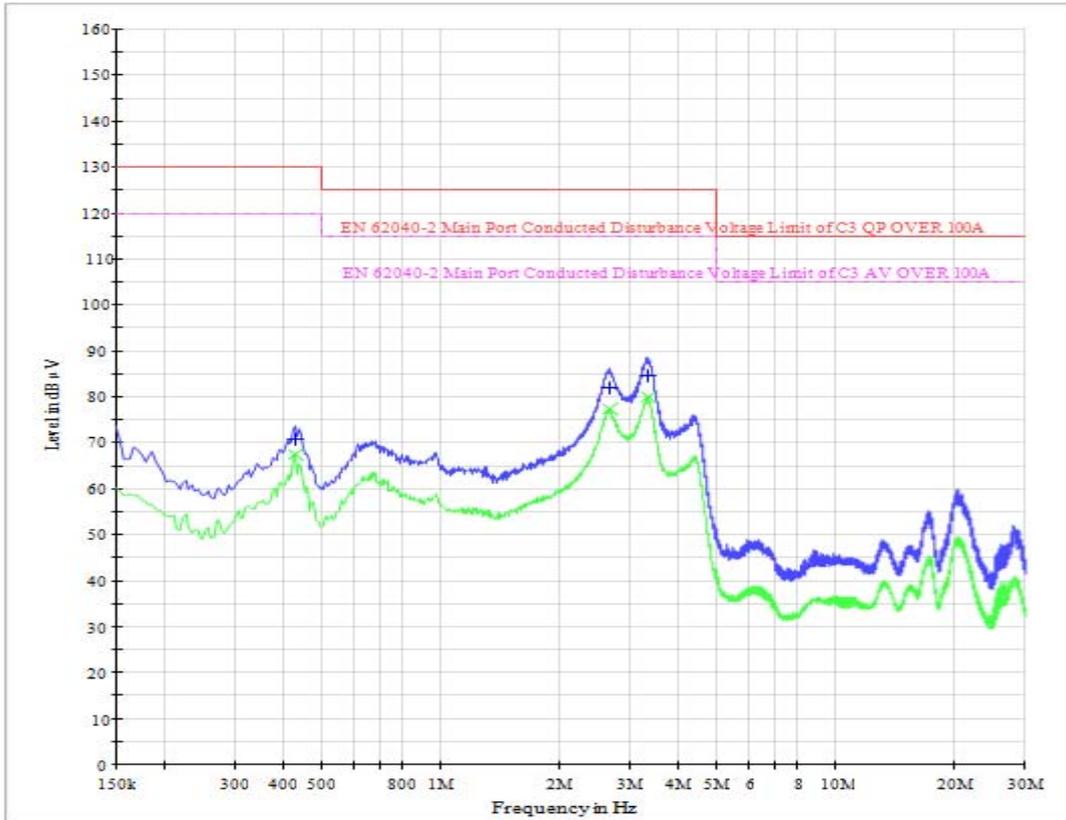

Mains terminal disturbance voltage, N phase

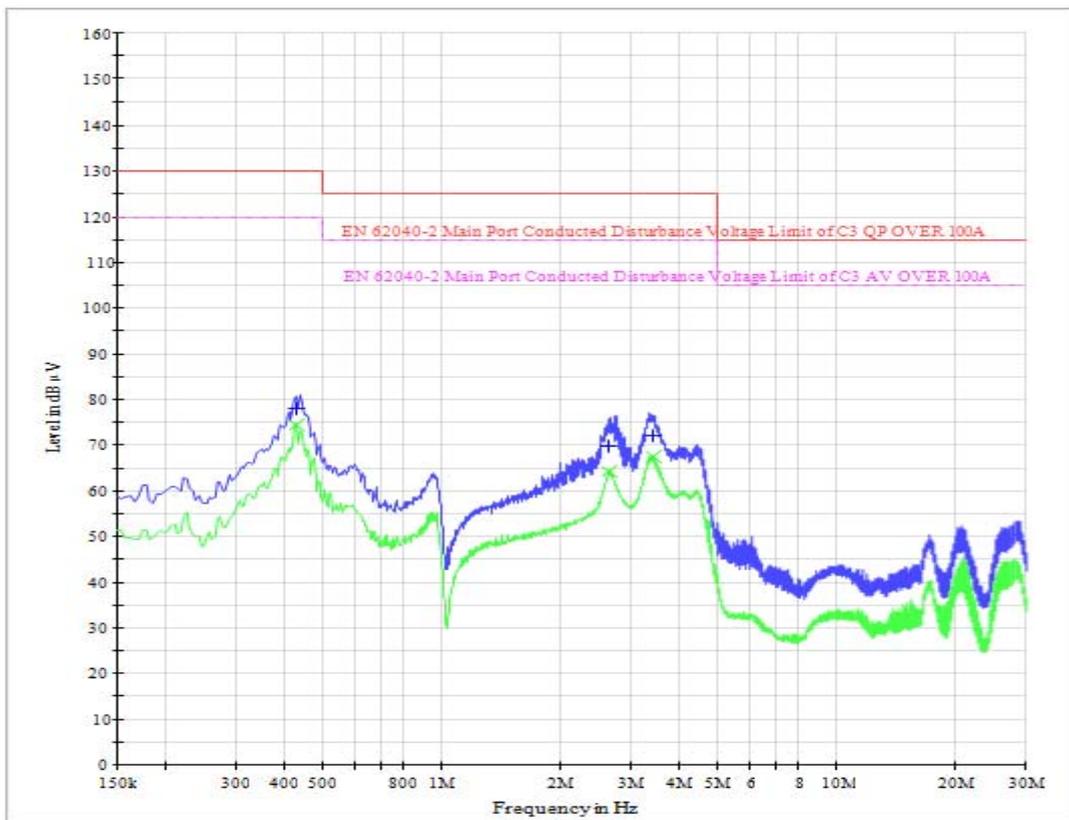

3.3 Radiated Disturbance Measurement


3.3.1 Limits of Radiated Disturbance

Frequency range (MHz)	Quasi peak limits(dB μ V/m), Category C3 at 10m measurement distance
30 – 230	50
230 - 1000	60

Notes:

- (1) The lower limit shall apply at the transition frequency.
- (2) Additional provisions may be required for cases where interference occurs.

3.3.2 Test Setup

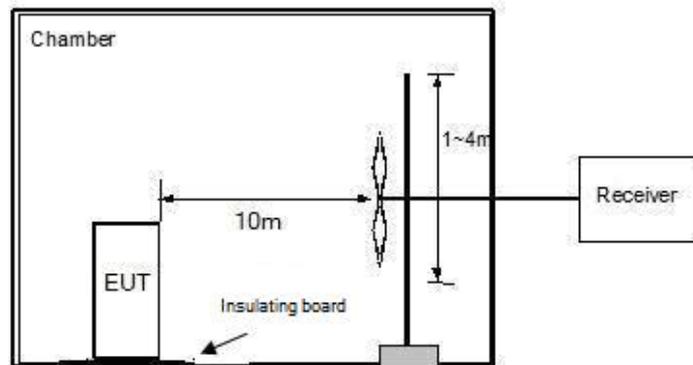


3.3.3 Test Result


No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
120kVA Mode 1						
1	60.32	H	400	197	50	37.8
2	53.04	V	100	0	50	39.5
3	60.08	V	100	222	50	44.9
4	62.00	V	100	0	50	43.1
120kVA Mode 2						
1	59.60	H	400	220	50	36.0
2	62.72	H	400	256	50	35.7
3	34.84	V	100	312	50	44.2
4	57.16	V	100	68	50	43.9
5	60.08	V	100	129	50	46.5

120kVA Model 1:

1. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Horizontal

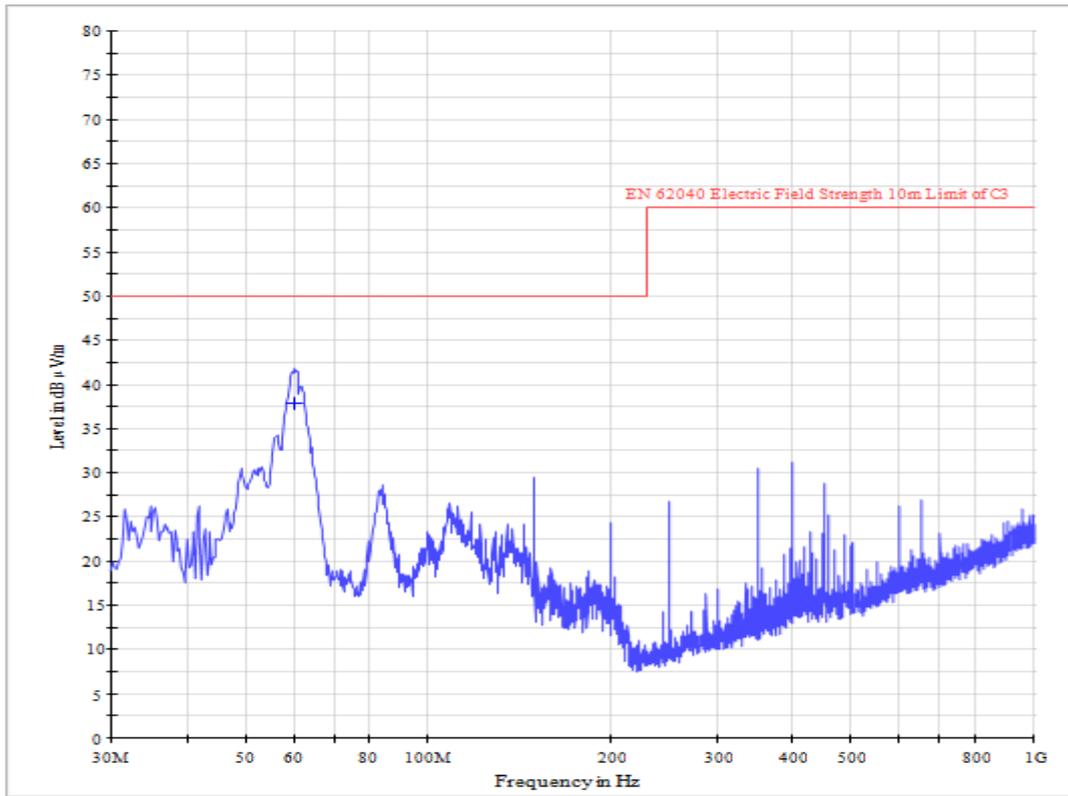


2. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Vertical

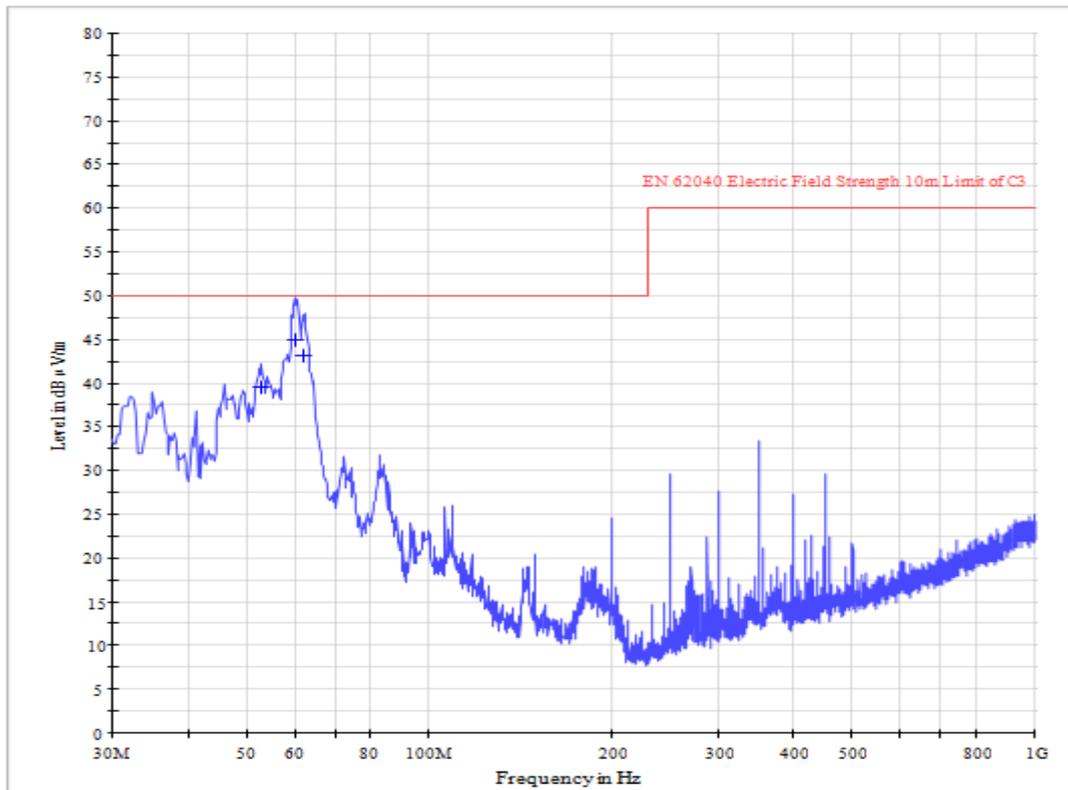


120kVA Model 2:

1. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Horizontal

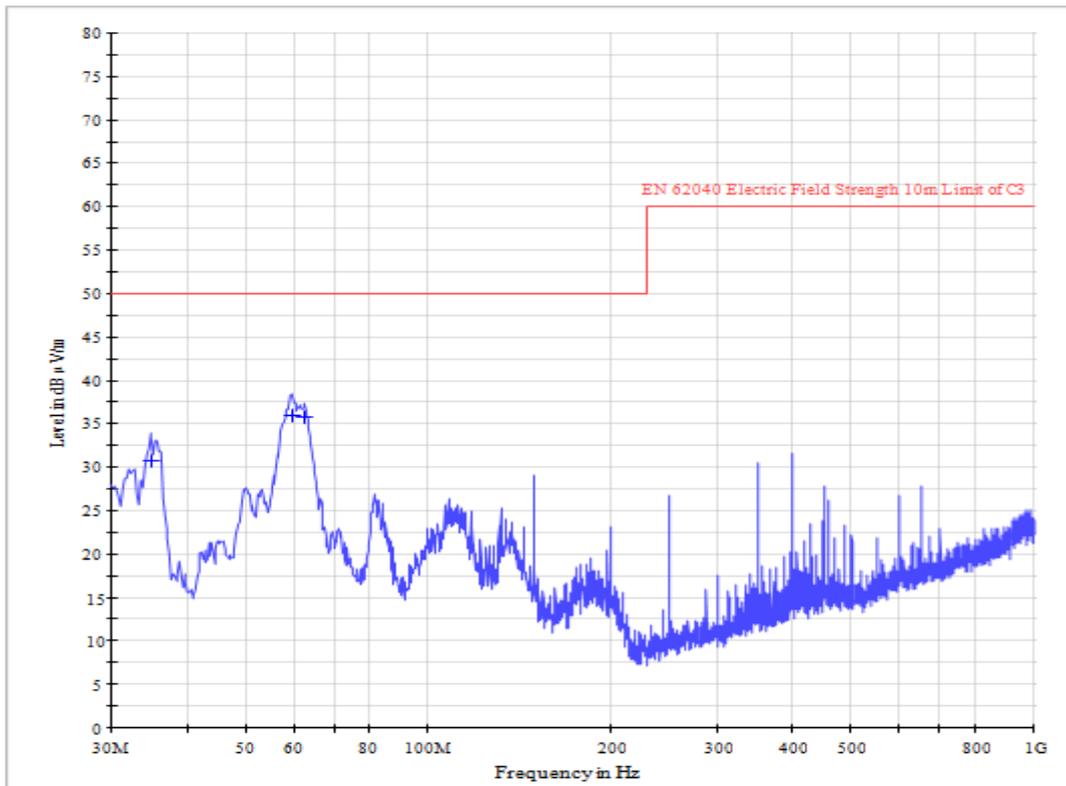

2. Electromagnetic radiation disturbances, max peak detector, antenna polarization: Vertical

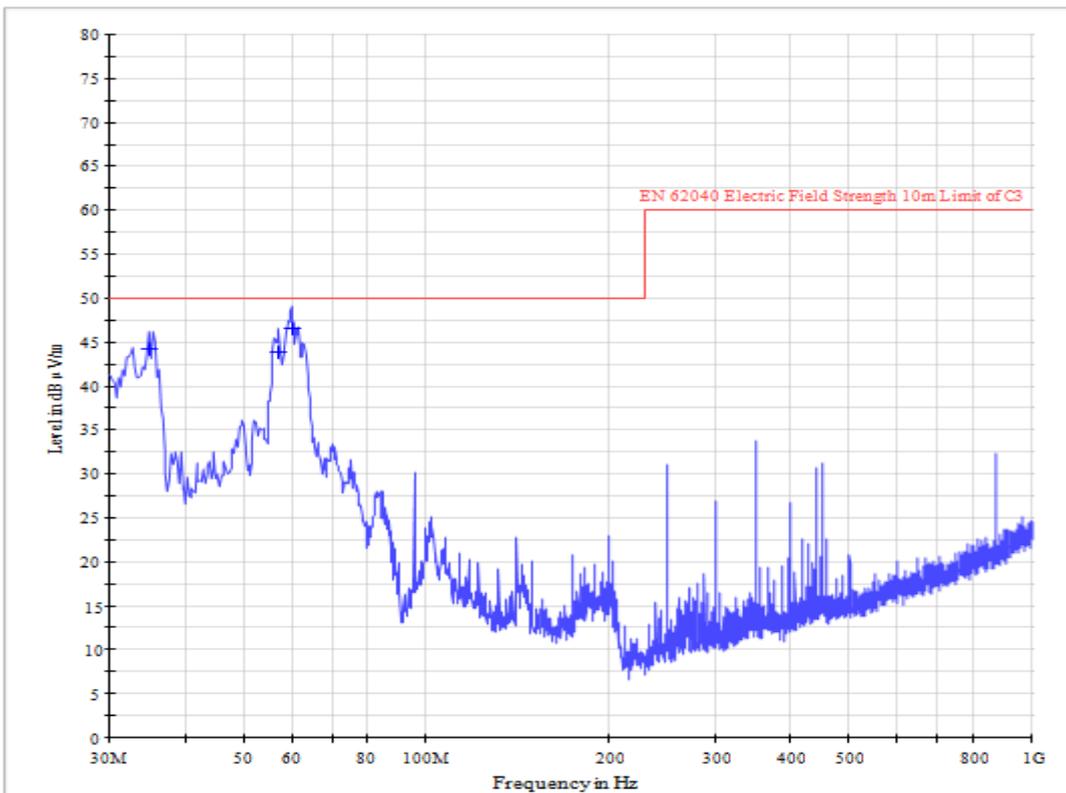



4 Immunity Test

4.1 EUT Setup and Operating Conditions

The EUT was powered by 380VAC mains and continuously operated.

Environment Condition:

Temperature: 24°C; Relative Humidity: 55%; Pressure: 101kPa

Test Date: 2017-04-06~2017-04-07

Test Engineer: Jiang Haibiao

Test Site: EMC Lab

4.2 Performance Criteria


Criterion A	The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
Criterion C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

4.3 Electrostatic Discharge Immunity Test

4.3.1 Test Specification

Basic Standard:	IEC 61000-4-2
Discharge Impedance	330 Ω / 150 pF
Discharge Voltage:	Air Discharge : 8 kV Contact Discharge : 4kV
Polarity:	Positive / Negative
Number of Discharge:	Minimum 20 times at each test point
Discharge Mode:	Single discharge
Discharge Period:	1-second minimum
Criterion:	B

4.3.2 Test Setup

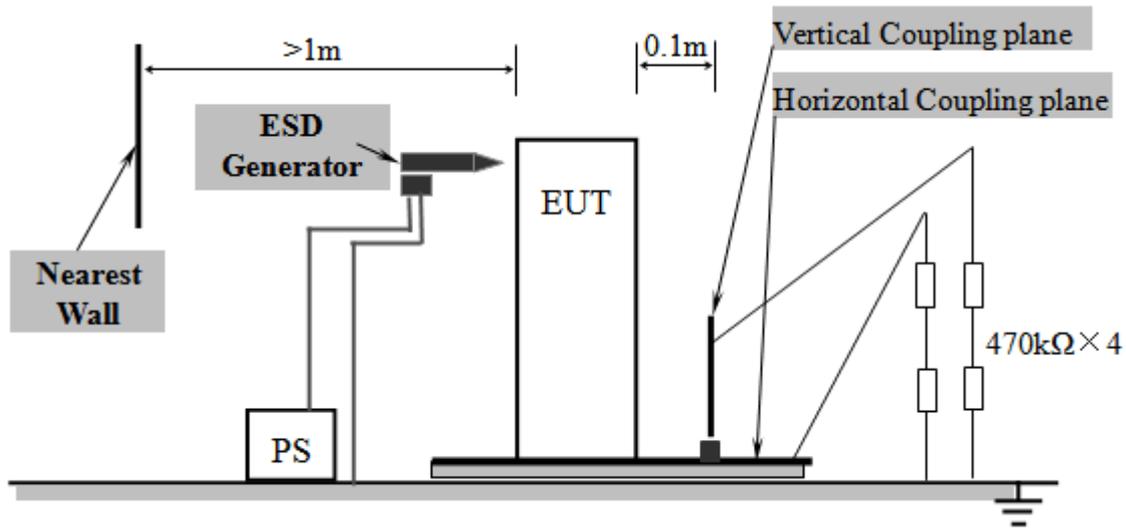

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

4.3.3 Test Result

Test Points	Discharge Level (kV)	Discharge Mode	Observation	Comply with Criterion
Aperture of the cover	±8	Air	Note(1)	A
Screen	±8	Air	Note(1)	A
Button	±8	Air	Note(1)	A
Metallic shell	±4	Contact	Note(1)	A
HCP	±4	Contact	Note(1)	A
VCP	±4	Contact	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.4 Radiated, Radio Frequency Electromagnetic Field Immunity Test

4.4.1 Test Specification

Basic Standard:	IEC 61000-4-3
Frequency Range:	80 MHz – 1000MHz
Field Strength:	10V/m
Modulation:	1kHz sine wave, 80%, AM modulation
Frequency Step:	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance:	3m
Antenna Height:	1.5m
Dwell Time:	3 seconds
Criterion:	A

4.4.2 Test Setup

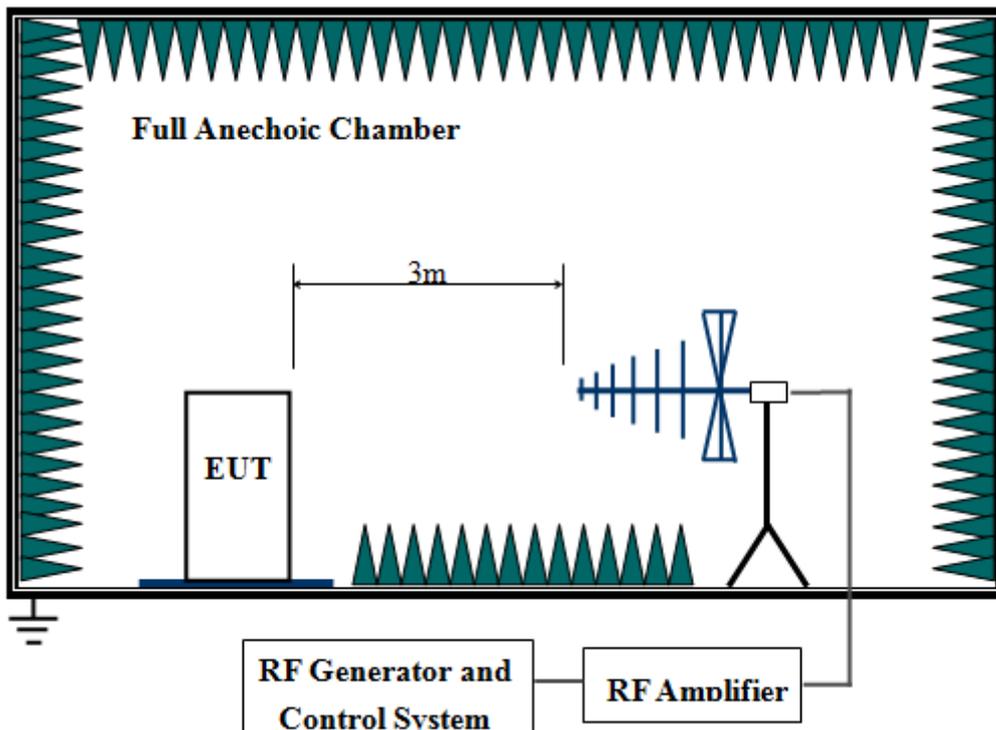

4.4.3 Test Result

Frequency	Polarity	Azimuth	Field Strength (V/m)	Observation	Comply with Criterion
80-1000 MHz	V&H	0,90,180, 270	10	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.5 Electrical Fast Transient/Burst Immunity Test

4.5.1 Test Specification

Basic Standard:	IEC 61000-4-4
Test Voltage:	AC. power port:2 kV
Polarity:	Positive/Negative
Impulse Frequency:	5kHz
Impulse wave shape:	5/50ns
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	Not less than 1 min.
Criterion:	B

4.5.2 Test Setup

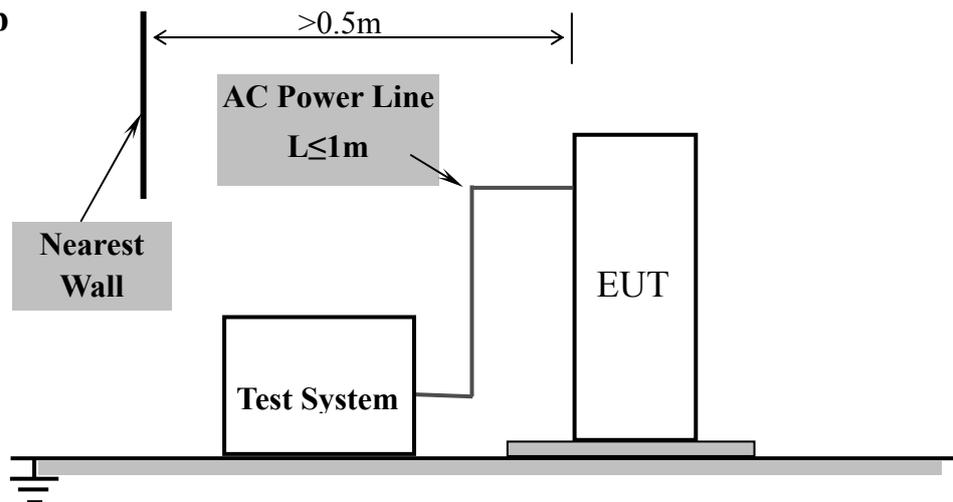

4.5.3 Test Result

Test Point	Polarity	Test Level (kV)	Observation	Comply with Criterion
AC Power Port	+/-	2	Note (1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.6 Surge Immunity Test

4.6.1 Test Specification

Basic Standard:	IEC 61000-4-5
Waveform:	Voltage 1.2/50 μ s; Current 8/20 μ s
Test Voltage:	a.c. power port, line to line 1kV, line to earth 2kV
Polarity:	Positive/Negative
Phase Angle:	0° , 90° , 180° , 270°
Repetition Rate:	60sec
Times:	5 time/each condition.
Criterion:	B

4.6.2 Test Setup

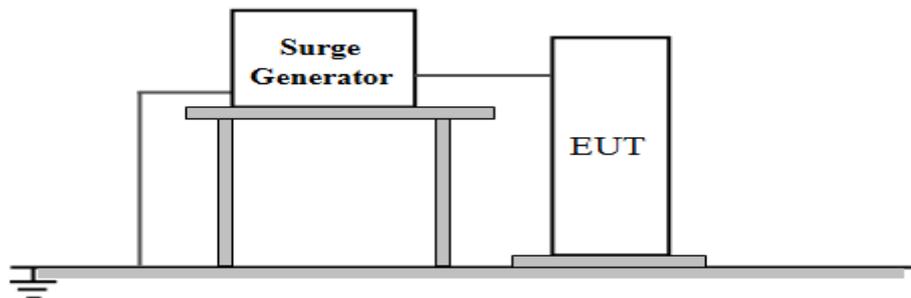

4.6.3 Test Result

Coupling Line	Polarity	Voltage (kV)	Observation	Comply with Criterion
AC power, Line-Line	+/-	1	Note (1)	A
AC power, Line-Earth	+/-	2	Note (1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.7 Immunity to Conducted Disturbances Induced by RF Fields

4.7.1 Test Specification

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 MHz – 80 MHz
Field Strength:	10V
Modulation:	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1% of fundamental
Coupled Cable:	AC. power line
Coupling Device:	Electromagnetic coupling clamp
Criterion:	A

4.7.2 Test Setup

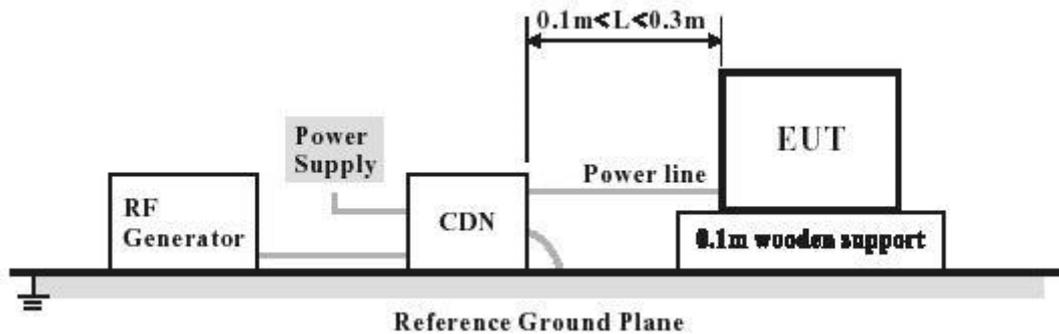

4.7.3 Test Result

Test Point	Frequency	Field Strength (Vrms)	Observation	Comply with criterion
AC power line	0.15 – 80 MHz	10	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.8 Power Frequency Magnetic Field Immunity Test

4.8.1 Test Specification

Basic Standard:	IEC 61000-4-8
Frequency Range:	50Hz
Field Strength:	30A/m
Observation Time:	2 minute
Inductance Coil:	Rectangular type, 1m × 1m
Criterion:	B

4.8.2 Test Setup

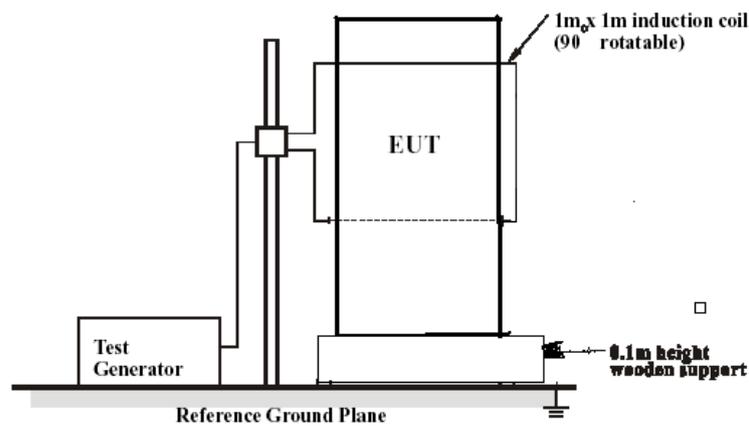

4.8.3 Test Result

Direction	Field Strength(A/m)	Observation	Comply with Criterion
X	30	Note(1)	A
Y	30	Note(1)	A
Z	30	Note(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed

4.9 Power line harmonics and inter-harmonics

4.9.1 Test Specification

Basic Standard:	IEC 61000-2-2
Disturbing Voltage:	10V
Frequency:	140 Hz to 360 Hz
Criterion:	A

4.9.2 Test Setup

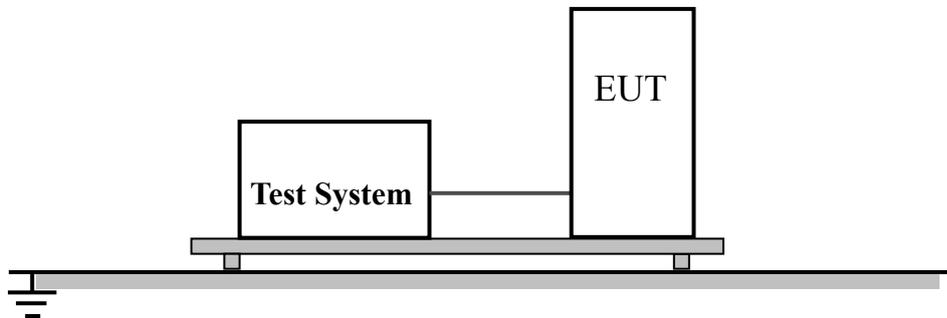

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

4.9.3 Test Result

Phenomenon	Reference document and level	Operating time (min.)	Observation	Comply with Criterion
Harmonics and Interharmonics	IEC 61000-2-4 10V	2.5	Note (1)	A

Note:


- (1). The EUT continued to operate as intended after test. Loss of function was observed.
- (2). The EUT continued to operate as intended after test. Temporary loss of function was observed during test.

4.10 Power line unbalance

4.10.1 Test Specification

Basic Standard:	IEC 61000-2-2
Voltage unbalance:	Level-Class 3, 3% negative sequence component, 10 min durations
Power frequency variation:	±4%
Frequency rate of change:	±2%
Criterion:	A

4.10.2 Test Setup

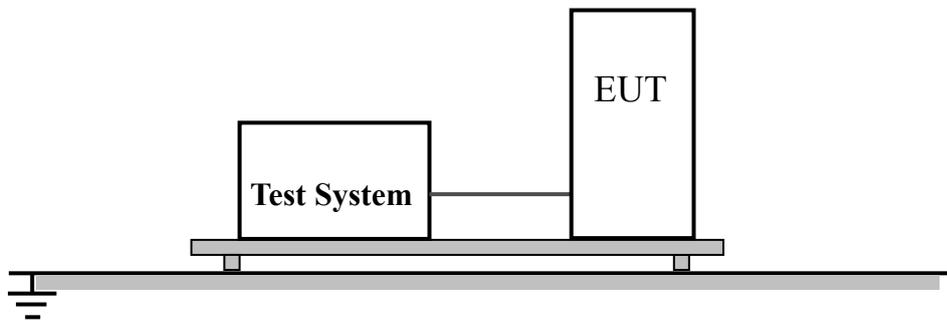

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.

4.10.3 Test Result

Phenomenon	Reference document and level	Operating time (min.)	Observation	Comply with Criterion
Voltage unbalance	IEC 61000-2-4 3% negative sequence component	10	Note (1)	A

Note:


- 1) The EUT continued to operate as intended. No degradation of performance was observed.

Appendix I: Photographs of the EUT



Appendix II: Photographs of EMC Test Configuration

1. Mains Terminal Disturbance Voltage Measurement

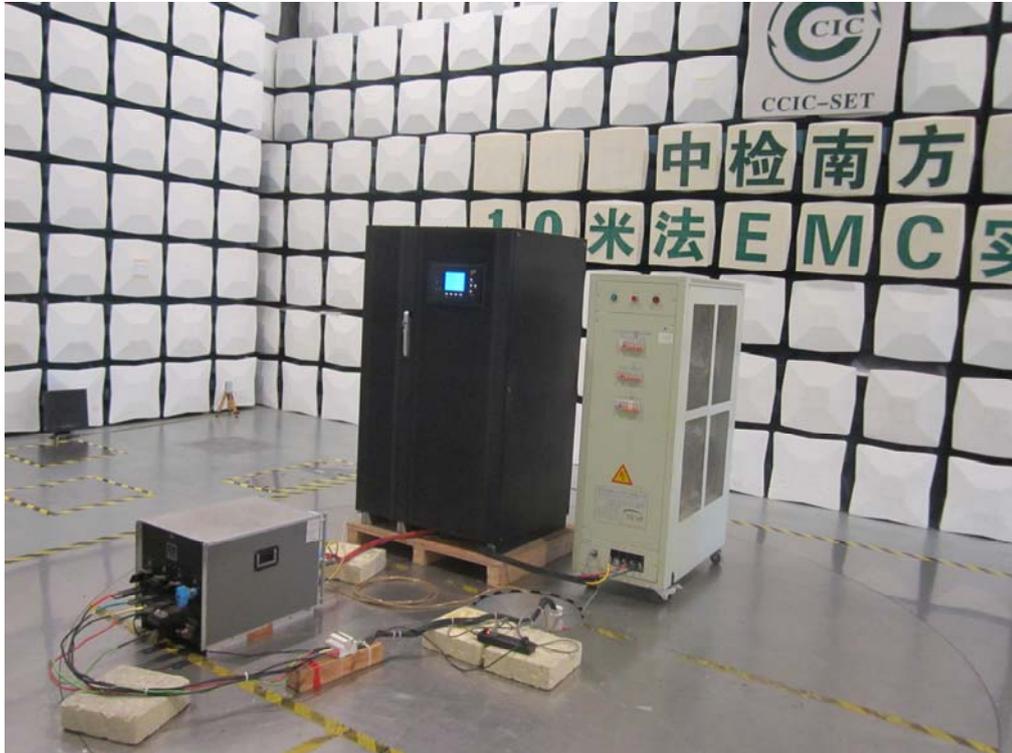


2. Radiated Field Strength Measurement



3. Electrostatic Discharge Immunity Test



4. Radiated, Radio Frequency Electromagnetic Field Immunity Test

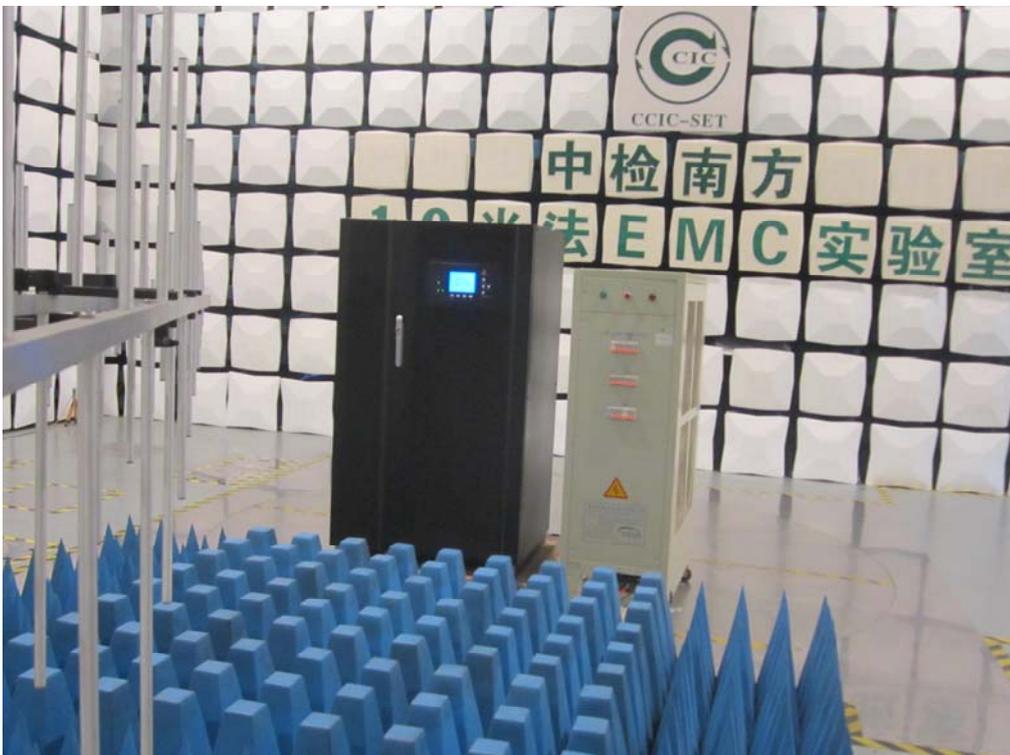

5. Electrical Fast Transient/Burst Immunity Test, Surge Immunity Test



6. Immunity to Conducted Disturbances Induced by RF Fields



7. Power Frequency Magnetic Field Immunity Test



8. Power line harmonics and inter-harmonics





STATEMENT

1. **The test report is invalid without stamp of laboratory.**
2. **The test report is invalid without signature of person(s) testing and authorizing.**
3. **The test report is invalid if erased and corrected.**
4. **Test results of the report are valid to the test samples if sampling by client.**
5. **“☆” project was not maintained by CNAS recognition and CMA.**
6. **The test report shall not be reproduced except in full, without written approval of the laboratory.**
7. **If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.**

Address: Electronic Testing Building, No. 43 Shahe Road, Xili Jiedao, Nanshan District, 518055

Shenzhen, Guangdong, China

P.C.: 518055

TEL: 0755-26628093, 26627338

FAX: 0755-26627238

Internet: <http://www.ccic-set.com>

E-Mail: manager@ccic-set.com