

EA900RT Li
(220V)
1 kVA ~ 3 kVA
PF 1.0




Features


- High frequency on-line double conversion technology
- DSP (Digital signal processing) control technology
- Active power factor correction (APFC), input power factor up to 0.99
- Output power factor 1.0
- Wide input voltage range (110 V ~ 300 Vac) and frequency range (40 ~ 70 Hz)
- Auto sensing frequency
- 50 / 60 Hz frequency conversion
- Cold start
- Rear ventilation design and variable speed fan
- Effective software and hardware protection
- Quick and stable charging, 90% capacity restored in 8h (standard model UPS)
- Linear derating in low voltage input reducing battery discharging times
- Settable delayed start when power is restored
- Hot-swappable battery
- Advanced battery management (ABM)
- Multiple functions settable via LCD: output voltage, EOD, auto-start, bypass mode
- Multi-platform communications: RS232 (standard), USB / RS485 / SNMP / dry contacts (optional)
- Optional USB, RS485 card, AS400 dry contacts, SNMP card, SMS alarms, EPO function, MBS (External maintenance bypass switch)

Rear Panel


1. AC input socket
2. Battery connector (Optional)
3. Fan
4. USB (Optional)
5. EPO (Optional)
6. RS232
7. Intelligent slot (Optional)
8. Output sockets




1KVASRT (25.6V)



3KVASRT (76.8V)



2KVASRT (51.2V)

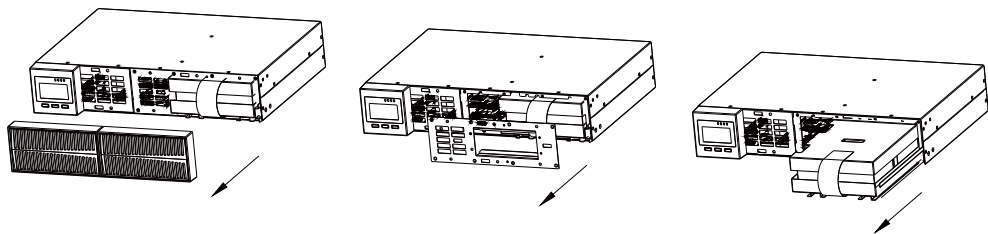

Easy for maintenance, hot-swappable battery

Specifications

MODEL	EA901RT	EA902RT	EA903RT
Capacity	1kVA / 1kW	2kVA / 2kW	3kVA / 3kW
INPUT			
Rated voltage	208 / 220 / 230 / 240 Vac		
Voltage range	110 ~ 176 Vac (linear derating between 50% and 100% load); 176 ~ 280 Vac (no derating); 280 ~ 300 Vac (derating 50%)		
Frequency	40 ~ 70 Hz (auto-sensing)		
Power factor	≥ 0.99		
Bypass voltage range	-25% ~ +15% (settable)		
Total harmonic distortion (THDi)	≤ 6%		
OUTPUT			
Voltage	208 / 220 / 230 / 240 Vac (settable via LCD)		
Voltage regulation	± 1%		
Frequency	45 ~ 55 Hz or 55 ~ 65 Hz (synchronized range); 50 / 60 Hz ± 0.1 Hz (battery mode)		
Waveform	Sinusoidal		
Power factor	1.0		
Total harmonic distortion (THDv)	≤ 2% (linear load); ≤ 5% (non-linear load)		
Crest factor	3:1		
Overload	105% ~ 125% for 1 min, 125% ~ 150% for 30 s, > 150% for 300 ms		
BATTERIES			
Battery type	Lithium iron phosphate battery		
DC voltage	25.6V (S)	51.2V (S)	76.8V (S)
Inbuilt battery	8×3.2V/8.7Ah	16×3.2V/8.7Ah	24×3.2V/8.7Ah
Charging current (max.)	Standard model: 1A		
Recharger time	Standard model: 90% capacity restored in 8 hours		
SYSTEM			
Efficiency	≥ 90% (Mains mode)	≥ 91% (Mains mode)	≥ 92% (Mains mode)
	≥ 85% (Battery mode)	≥ 86% (Battery mode)	≥ 87% (Battery mode)
	≥ 95% (ECO mode)	≥ 96% (ECO mode)	≥ 97% (ECO mode)
Transfer time	Mains mode to battery mode: 0 ms Inverter mode to bypass mode: 4 ms (typical)		
Protections	Short-circuit, overload, overtemperature, battery discharge protection and fan testing protection		
Communications	RS232 (standard), USB / RS485 / dry contacts / SNMP (optional)		
Display	LCD + LED		
Standards	EN 62040-1, EN 62040-2, EN 61000-3-2, EN 61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, IEC 61000-2-2, IEC 62040-2, IEC 62040-1		
OTHERS			
Operating temperature	0°C ~ 40°C		
Storage temperature	-25°C ~ 55 °C (without batteries)		
Relative humidity	0~95% (non-condensing)		
Altitude	≤ 1000 m, derating 1% for each additional 100 m		
IP rating	IP 20		
Noise level at 1m	≤ 50 dB		
Dimensions (W × D × H) (mm)	440×316×88	440×430×88	440×560×88
Packaged dimensions (W×D×H) (mm)	545×428×194	545×560×201	545×690×201
Net weight(kg)	9	15.2	20.8
Gross weight(kg)	9.7	18.3	23.7

- Derate capacity to 70% in CUCF mode and to 90% when the output voltage is adjusted to 208 Vac.
- S means standard model.
- All specifications are subject to change without notice.
- Custom-made specifications are acceptable.